

# Compact Thermal Plastic Exit Signs

Search Code: SC1532



## FEATURES

- *Durable Construction: Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.*
- *Red or Green LED EXIT sign illumination.*
- *Quick and easy installation.*
- *EZ snap-out Chevron directional indicators.*

## ELECTRICAL

- *Dual Voltage: 120-277V.*
- *Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).*
- *1.2V long life, maintenance-free, rechargeable Ni-Cd battery.*
- *Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.*
- *Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.*

## APPLICATION

- *Commercial Buildings.*
- *Restaurants & Cafés.*
- *Hotels & Hospitality.*
- *Healthcare Facilities.*
- *Apartment Complexes & Condos.*




## WARRANTY & LISTINGS

- *Warranty: 5 years.*
- *Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.*
- *UL Listed for damp locations.*
- *Certified to CEC under Title 20 Regulations.*

## MOUNTING

- *EZ-snap mounting canopy included for top or end mount.*
- *Universal K/O pattern on back plate for wall mount.*

## DIMENSIONS

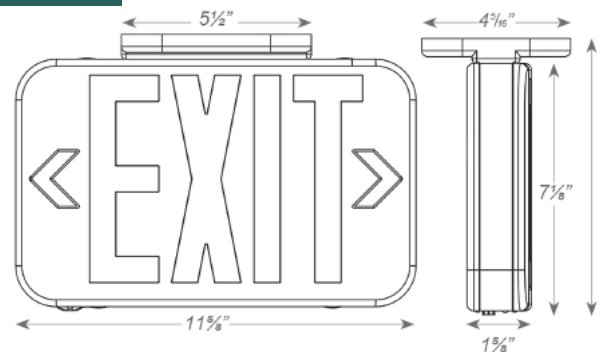

## ORDERING INFORMATION

Product Code	Lettering Color	Housing Color	Battery Back-up
9000LEDBRG-1	Red/Green	Black	No
9000LEDWRG-1	Red/Green	Black	No
9001LEDBRG-EM-1	Red/Green	White	Yes
9001LEDWRG-EM-1	Red/Green	White	Yes