


# RETROFIT LED Retrofit Kits



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## SCREW-IN KIT

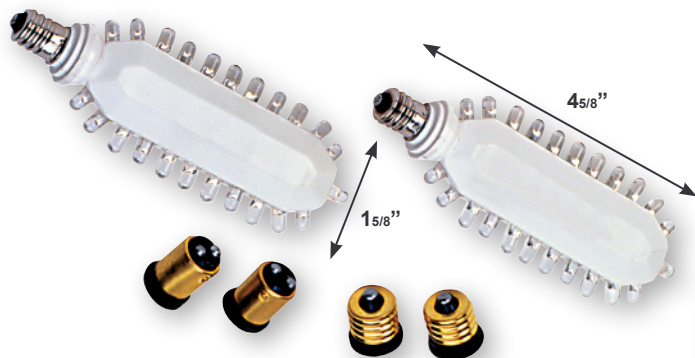

### STANDARD



### ILLUMINATION

- Kits easily convert incandescent exit signs to energy efficient LED Exit signs.
- Ultra bright, long-life red or green LED.

### ELECTRICAL

#### Hard wire:


- Dual 120/277 voltage.
- Energy usage of 2.8W per kit.

#### Screw-in:

- 120V only.
- Energy usage of 2.8W per kit.

### MOUNTING

- Hard wire kits come complete with mounting bracket and double-sided tape for easy installation.
- Screw-in kits are supplied with socket adapters for installation in signs with bayonet, intermediate or candelabra bases.

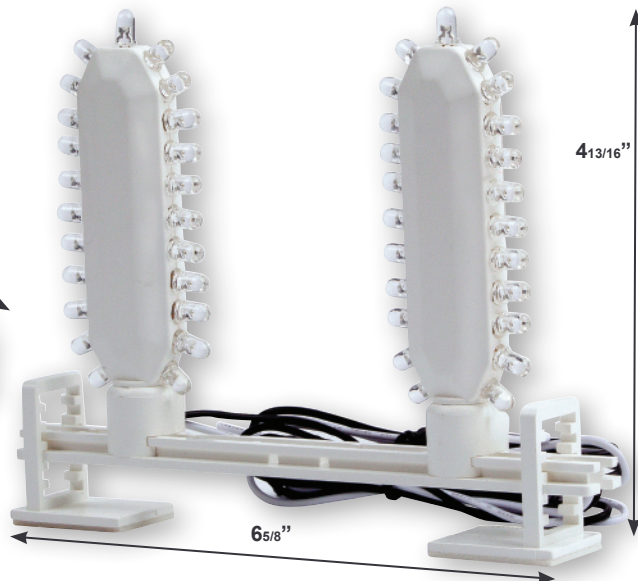

## HARD WIRE KIT

### WARRANTY/LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Code.

Energy Efficient: LEDs use a fraction of the wattage of incandescent bulbs!

	Incandescent EXIT	EXIT replaced with Green LED Retrofit Kit	EXIT replaced with Red LED Retrofit Kit
<b>EXIT Energy Usage</b>	30W (Two 15W lamps)	1.4W (Two 0.7W LED lamps)	2.8W (Two 1.4W LED lamps)
<b>Hours ON per year</b>	24 x 365 = 8760 hours	24 x 365 = 8760 hours	24 x 365 = 8760 hours
<b>Price per KiloWatt Hour</b>	\$0.09/KWhr	\$0.09/KWhr	\$0.09/KWhr
<b>Energy Usage per Year</b>	262,800 Watts	12,264 Watts	24,528 Watts
<b>Dollars Spent per Year</b>	\$23.65	\$1.10	\$2.21
<b>ENERGY SAVINGS PER YEAR</b>	-	<b>250,536 WATTS</b>	<b>238,272 WATTS</b>
<b>SAVINGS PER YEAR</b>	-	<b>\$22.55</b>	<b>\$21.44</b>

\*Example based on 9¢/KWhr

### ORDERING INFORMATION

Model	Kit
RFXTE-1	Red Hardwire Kit
GFXTE-1	Green Hardwire Kit
RFXTE-3	Red Screw-in Kit
GFXTE-3	Green Screw-in Kit

Sample Part Number: RFXTE-3