



ColorBlast 12 ColorBlast 6

The original exterior LED wash fixture with intelligent color light

ColorBlast 12

ColorBlast 6

The original exterior LED wash fixture with intelligent color light

High-performance ColorBlast LED fixtures generate rich, saturated colors and color-changing effects for a range of wall-washing and floodlighting applications. Designed with the needs of lighting designers, architects, and retail window directors in mind, ColorBlast can be used in both indoor and outdoor installations.

ColorBlast 12 high-intensity LEDs produce superior light output of over 1200 lumens, while ColorBlast 6 produces a lower intensity output in a compact, low-profile housing. Both versions offer full pan and tilt rotation, flexible mounting options, two beam angles, and superior control through Philips or third-party DMX controllers.

- Two beam patterns — A frosted glass lens (22° beam angle for ColorBlast 12, 21° for ColorBlast 6) produces a soft-edge beam, while a clear glass lens (10° beam angle) affords extended light projection.
- Flexible mounting options — The versatile fixture canopy base can be mounted to a junction box or directly to a wall, ceiling, or floor. A liquid-tight cable fitting seals the canopy opening for use in damp or wet environments.
- Versatile light positioning — The locking canopy base offers friction-free rotation of up to 350°, and 110° fixture tilting lets installers quickly aim the fixture without special tools.
- Industry-leading controls — ColorBlast fixtures work seamlessly with the complete line of Philips controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, as well as third-party controllers.
- Additional options for controlling and dispersing light — Designed specifically for the family of ColorBlast fixtures by City Theatrical, Inc., accessories include top hats, half top hats, egg crate louvers, barndoors, and horizontal and vertical spread lenses.



Outdoor Rated

Fully sealed for maximum fixture life and IP66 rated for outdoor applications, ColorBlast fixtures meet or exceed specifications for use in wet locations. Rugged, die-cast aluminum housing is available in white or black powder-coated finish.

Transforming Chicago with ColorBlast

Transforming the Nightclub

Chicago's ultra contemporary Soundbar boasts two levels of entertainment with an eye-popping interior unlike any other. The 20,000 sq ft (1858 m²) nightclub is comprised of unique lounges, bar areas, and dance floors, each distinguished by its own vivid hue. To add sparkle to the club's exterior and main dance area, Soundbar's lighting designers enlisted the help of intelligent LED lighting from Philips Color Kinetics.

The industrial building's exterior façade features glass panels, lit by ColorBlast 6 fixtures, which gradually change color over the course of an hour. The compact, rugged fixtures wash the glass surfaces with rich colors ranging from bright red to exotic green.

Inside the club, ColorBlast 6 fixtures envelop the main dance area (shown here and on the cover) in deep shades of blue. To complement the design and high-energy music, four clear acrylic columns, internally lit by ColorBlast 6, extend from floor to ceiling. Because the fixtures are low-heat and low-maintenance, the project designers could install them in concealed and hard-to-reach spaces. In addition, the dynamic effects are easily rendered with the club's existing DMX control system.



Lighting Design: Michael Dreas, Dreas and Associates



Transforming the Fountain

Completed in July 2004, the acclaimed Crown Fountain, located in Chicago's Millennium Park, is an interactive sculpture comprising glass, water, and light. The fountain encompasses two 50 ft (15 m) glass block towers linked by a 232 ft (71 m) reflecting pool. Each translucent tower is lit by approximately 70 ColorBlast 12 fixtures, which gradually change color. Because of their compact size, the designers were able to install the ColorBlast fixtures where needed to properly illuminate the towers and glass.

In order to make the towers appear light and translucent, with their internal structures reflecting light from behind the glass surface, the designers installed the ColorBlast fixtures on continuous channels mounted between the glass blocks and the structures, aiming straight upwards to illuminate the structures just beyond the glass. The towers glow from within on three sides, while the fourth sides feature LED video displays that project the diverse faces of Chicago and nature scenes. Water cascades down the outside of the towers into the pool below.

According to the project architect, the ability to manipulate the lighting in multiple ways, depending on time of day and season, was an important consideration. Because longevity and dependability were also key to the design, ColorBlast fixtures, with their long lifetimes and low maintenance requirements, were the logical choice. Both the lighting and fountain controls respond to one DMX-based control system, which integrates seamlessly with the ColorBlast fixtures.




Photo Credits: Hedrich Blessing


Photometrics

Photometric data is based on test results from an independent NIST traceable testing lab. IES data is available at www.philipscolorkinetics.com/support/ies.

ColorBlast 12 10° beam angle

LED	Lumens	Efficacy
RGB	1207	16.9

Polar Candela Distribution



Illuminance at Distance

Center Beam fc	Beam Width
4.0 ft	1708 fc
8.0 ft	427 fc
12.0 ft	190 fc
16.0 ft	107 fc
20.0 ft	68 fc
24.0 ft	47 fc

165 ft (50.3 m)
1 fc maximum distance

Vert. Spread: 9.6°
Horiz. Spread: 9.7°

Zonal Lumen

Zone	Lumens	% Lamp	% Luminaire
0-30	1,062.6	88%	88.1%
0-40	1,134.6	94%	94.1%
0-60	1,197.4	99.2%	99.3%
60-90	8.1	0.7%	0.7%
0-90	1,205.5	99.9%	100%
90-180	0	0%	0%
0-180	1,205.5	99.9%	100%
Total Efficiency:	99.9%		

Coefficients Of Utilization - Zonal Cavity Method


Effective Floor Cavity Reflectance: 20%																							
RCC %:	80	70	50	30	0	70	50	30	0	50	30	20	10	0	30	20	10	0	50	30	20	10	0
RW %:	70	50	30	0	0	70	50	30	0	0	50	30	20	10	0	50	30	20	10	0	50	30	20
RCR:	0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	1.02	1.02	1.02	1.00
	1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	.98	1.07	1.06	1.05	1.04	1.03	1.02	1.00	1.00	.98	.99	.97	.96	.95	.97
	2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.95	1.04	1.02	1.00	1.01	1.00	.98	.99	.97	.96	.95	.97	.95	.94	.93
	3	1.09	1.05	1.02	.99	1.07	1.03	1.01	.93	1.01	.99	.97	.99	.97	.95	.97	.95	.94	.93	.95	.93	.92	.91
	4	1.06	1.01	.98	.95	1.05	1.00	.97	.91	.99	.96	.94	.97	.94	.93	.95	.93	.92	.91	.93	.91	.90	.89
	5	1.04	.99	.95	.92	1.02	.98	.94	.89	.96	.93	.91	.95	.92	.91	.93	.91	.90	.89	.92	.90	.88	.87
	6	1.02	.96	.93	.90	1.00	.96	.92	.88	.94	.91	.89	.93	.91	.89	.92	.90	.88	.87	.90	.88	.86	.85
	7	1.00	.94	.91	.88	.99	.94	.90	.86	.93	.90	.87	.92	.89	.87	.91	.88	.87	.86	.89	.87	.85	.85
	8	.98	.92	.89	.86	.97	.92	.89	.85	.91	.88	.86	.90	.88	.86	.89	.87	.85	.85	.88	.86	.84	.83
	9	.96	.91	.87	.85	.95	.90	.87	.84	.90	.87	.85	.89	.86	.84	.88	.86	.84	.83	.86	.84	.82	.82
	10	.95	.89	.86	.84	.94	.89	.86	.83	.88	.85	.83	.88	.85	.83	.87	.85	.83	.82	.85	.83	.81	.81

RCC %: Ceiling reflectance percentage, RW %: Wall reflectance percentage, RCR: Room cavity ratio

ColorBlast 12 22° beam angle

LED	Lumens	Efficacy
RGB	1090	15.3

Polar Candela Distribution



Illuminance at Distance

Center Beam fc	Beam Width
4.0 ft	269 fc
8.0 ft	67 fc
12.0 ft	30 fc
16.0 ft	17 fc
20.0 ft	11 fc
24.0 ft	7 fc

65.5 ft (19.9 m)
1 fc maximum distance

Vert. Spread: 20.9°
Horiz. Spread: 21.0°

Zonal Lumen

Zone	Lumens	% Lamp	% Luminaire
0-30	824.1	75.6%	75.7%
0-40	929.8	85.3%	85.4%
0-60	1,046.7	96%	96.1%
60-90	42.5	3.9%	3.9%
0-90	1,089.2	99.9%	100%
90-180	0	0%	0%
0-180	1,089.2	99.9%	100%
Total Efficiency:	99.9%		

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%																							
RCC %:	80	70	50	30	0	70	50	30	0	50	30	20	10	0	30	20	10	0	50	30	20	10	0
RW %:	70	50	30	0	0	70	50	30	0	0	50	30	20	10	0	50	30	20	10	0	50	30	20
RCR:	0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	1.02	1.02	1.02	1.00
	1	1.14	1.11	1.08	1.06	1.11	1.09	1.07	.94	1.05	1.03	1.01	1.01	1.00	.98	.98	.96	.95	.94	.98	.96	.95	.94
	2	1.08	1.04	1.00	.96	1.06	1.02	.98	.88	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88	.93	.91	.89	.88
	3	1.03	.97	.93	.89	1.01	.96	.92	.83	.93	.90	.87	.91	.88	.85	.89	.86	.84	.82	.89	.86	.84	.82
	4	.99	.92	.87	.83	.97	.91	.86	.79	.89	.86	.84	.87	.83	.80	.85	.82	.79	.78	.85	.82	.79	.78
	5	.95	.87	.82	.78	.93	.86	.81	.75	.84	.80	.77	.83	.79	.76	.81	.78	.75	.74	.81	.78	.75	.74
	6	.91	.83	.77	.74	.89	.82	.77	.72	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71	.78	.75	.72	.71
	7	.87	.79	.74	.70	.86	.78	.73	.69	.77	.73	.69	.76	.72	.69	.75	.71	.69	.67	.75	.71	.69	.67
	8	.84	.76	.71	.67	.83	.75	.70	.66	.74	.70	.66	.73	.69	.66	.72	.69	.66	.65	.72	.69	.66	.65
	9	.81	.73	.68	.64	.80	.72	.67	.63	.71	.67	.64	.71	.67	.64	.70	.66	.63	.62	.70	.66	.63	.62
	10	.79	.70	.65	.62	.78	.70	.65	.61	.69	.65	.62	.68	.64	.61	.68	.64	.61	.60	.68	.64	.61	.60


RCC %: Ceiling reflectance percentage, RW %: Wall reflectance percentage, RCR: Room cavity ratio

For lux multiply fc by 10.7

ColorBlast 6 10° beam angle


LED	Lumens	Efficacy
RGB	584	14.2

Polar Candela Distribution



	0	22.5	44	67.5	90
90°	0	13754	13754	13754	13754
80°	5	6424	6412	6484	6469
70°	15	210	213	219	217
60°	25	73	74	75	74
50°	35	52	52	54	52
40°	45	25	25	26	24
30°	55	9	8	9	9
20°	65	3	3	3	3
10°	75	1	0	0	0
0°	85	0	0	0	0
90°	90	0	0	0	0

Illuminance at Distance

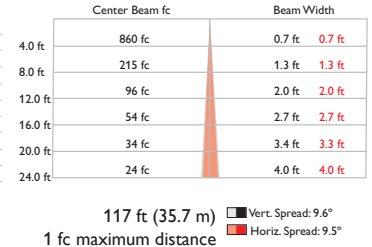

Zonal Lumen

Zone	Lumens	% Lamp	% Luminaire
0-30	518.9	88.9%	89.1%
0-40	551.9	94.5%	94.7%
0-60	579.2	99.2%	99.4%
60-90	3.4	0.6%	0.6%
0-90	582.7	99.8%	100%
90-180	0	0%	0%
0-180	582.7	99.8%	100%
Total Efficiency:	99.8%		

Coefficients Of Utilization - Zonal Cavity Method


		Effective Floor Cavity Reflectance: 20%											
RCC %:		80			70			50			30		
RW %:		0	50	30	0	0	0	50	30	20	50	30	20
RCR:		0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11
		1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	.98	1.07	1.06	1.05
		2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.96	1.04	1.02	1.01
		3	1.09	1.05	1.02	.99	1.07	1.04	1.01	.94	1.01	.99	.97
		4	1.06	1.02	.98	.96	1.05	1.01	.98	.92	.99	.96	.94
		5	1.04	.99	.96	.93	1.03	.98	.95	.90	.97	.94	.92
		6	1.02	.97	.93	.91	1.01	.96	.93	.89	.95	.92	.90
		7	1.00	.95	.91	.89	.99	.94	.91	.87	.93	.90	.88
		8	.98	.93	.89	.87	.97	.92	.89	.86	.92	.89	.87
		9	.97	.91	.88	.86	.96	.91	.88	.85	.90	.87	.85
		10	.95	.90	.87	.85	.95	.90	.87	.84	.89	.86	.84

RCC %: Ceiling reflectance percentage, RW %: Wall reflectance percentage, RCR: Room cavity ratio

ColorBlast 6 21° beam angle


LED	Lumens	Efficacy
RGB	534	13.0

Polar Candela Distribution



	0	22.5	44	67.5	90
90°	0	2096	2096	2096	2096
80°	5	1772	1772	1772	1772
70°	15	603	605	606	607
60°	25	187	187	187	188
50°	35	81	81	81	81
40°	45	43	43	43	43
30°	55	24	24	25	24
20°	65	13	13	13	13
10°	75	6	5	6	6
0°	85	0	0	0	0
90°	90	0	0	0	0

Illuminance at Distance

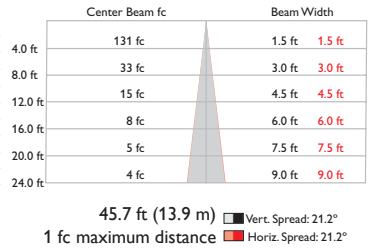

Zonal Lumen

Zone	Lumens	% Lamp	% Luminaire
0-30	406.7	76.2%	76.2%
0-40	458.4	85.8%	85.8%
0-60	514.2	96.3%	96.3%
60-90	19.9	3.7%	3.7%
0-90	534.1	100%	100%
90-180	0	0%	0%
0-180	534.1	100%	100%
Total Efficiency:	100%		

Coefficients Of Utilization - Zonal Cavity Method

		Effective Floor Cavity Reflectance: 20%											
RCC %:		80			70			50			30		
RW %:		0	50	30	0	0	0	50	30	20	50	30	20
RCR:		0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11
		1	1.14	1.11	1.09	1.06	1.11	1.09	1.07	.94	1.05	1.03	1.01
		2	1.08	1.04	1.00	.97	1.06	1.02	.99	.89	.99	.96	.93
		3	1.04	.97	.93	.89	1.02	.96	.92	.84	.93	.90	.87
		4	.99	.92	.87	.83	.97	.91	.86	.79	.89	.85	.82
		5	.95	.87	.82	.78	.93	.86	.81	.75	.85	.80	.77
		6	.91	.83	.78	.74	.90	.82	.77	.72	.81	.76	.73
		7	.88	.79	.74	.70	.86	.79	.74	.69	.78	.73	.70
		8	.84	.76	.71	.67	.83	.76	.71	.66	.75	.70	.67
		9	.82	.73	.68	.64	.81	.73	.68	.64	.72	.67	.64
		10	.79	.70	.65	.62	.78	.70	.65	.61	.69	.65	.62

RCC %: Ceiling reflectance percentage, RW %: Wall reflectance percentage, RCR: Room cavity ratio

For lux multiply fc by 10.7

Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	ColorBlast 6	ColorBlast 12
Output	Beam Angle	10° / 21°	10° / 22°
	Lumens*	584 (10° beam angle) 534 (21° beam angle)	1207 (10° beam angle) 1090 (22° beam angle)
	LED Channels	Red / Green / Blue	
	Mixing Distance	6 in (152 mm) to uniform light	
	Lumen Maintenance†	50,000+ hours L50 @ 50° C (full output)	
Electrical	Input Voltage	24 VDC via PDS-150e or PDS-60	
	Power Consumption	25 W maximum at full output, steady state	50 W maximum at full output, steady state
Control	Interface	PDS-150e 24V (DMX or Ethernet) PDS-60 24V (DMX, Pre-programmed, or Ethernet)	
	Control System	Philips full range of controllers, including Light System Manager, iPlayer 3, and ColorDial Pro, or third-party controllers	
Physical	Dimensions (Height x Width x Depth)	8.4 x 6.3 x 5.1 in (213 x 160 x 130 mm)	8.4 x 12.6 x 5.1 in (213 x 320 x 130 mm)
	Weight	Net: 6.5 lb (2.95 kg) Gross: 8.4 lb (3.8 kg)	Net: 8 lb (3.65 kg) Gross: 9.8 lb (4.45 kg)
	Housing	Die-cast aluminium, black or white powder-coated finish	
	Lens	Clear glass (10° beam angle) Frosted glass (21° beam angle)	Clear glass (10° beam angle) Frosted glass (22° beam angle)
	Fixture Connections	60 ft (18.3 m) unified power / data cable	
	Temperature Ranges	-40° – 122° F (-40° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage	
	Humidity	0 – 95%, non-condensing	
	Maximum Fixtures Per Power / Data Supply	PDS-150e 24V: 6 PDS-60 24V: 2	PDS-150e 24V: 3 PDS-60 24V: 1
Certification and Safety	Certification	UL / cUL, FCC Class A, CE, PSE, C-Tick, SAA, CQC	
	Environment	Dry / Damp / Wet Location, IP66	


* Lumen measurement complies with IES LM-79-08.

† L50 = 50% lumen maintenance (when light output drops below 50% of initial output). Ambient luminaire temperatures specified. Lumen maintenance calculations are based on lifetime prediction graphs supplied by LED source manufacturers. Calculations for white-light LED fixtures are based on measurements that comply with IES LM-80-08 testing procedures. Refer to www.philipscolorkinetics.com/support/appnotes/ for more information.


‡ These figures, provided as a guideline, are accurate for this configuration only. Changing the configuration can affect the fixture run lengths.

CHROMACORE™ | OPTIBIN™
CK TECHNOLOGY | CK TECHNOLOGY

ColorBlast 12

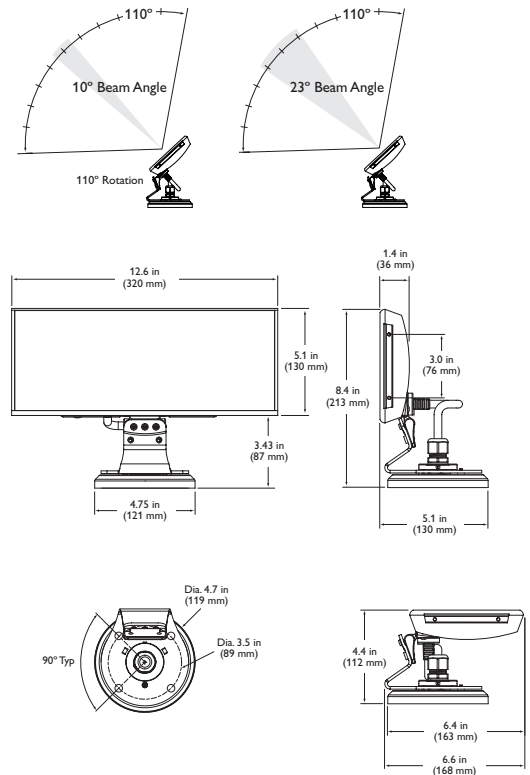

ColorBlast 6

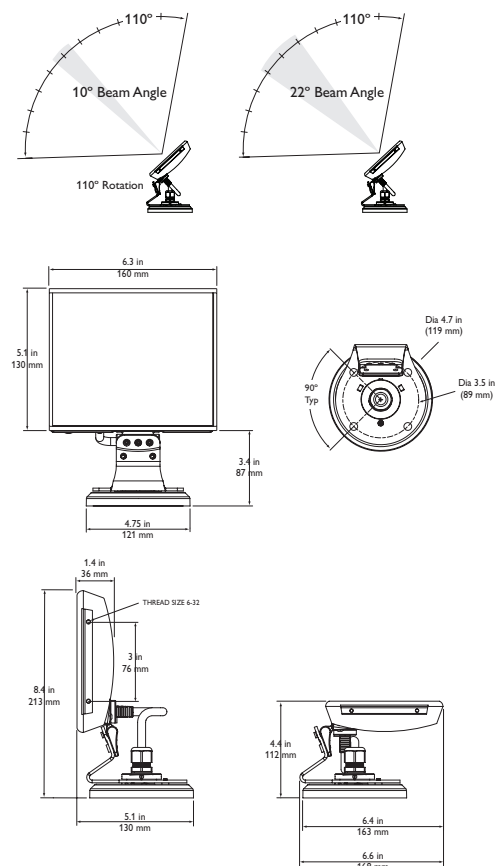

Fixtures, Power / Data Supplies, and Controllers

Included in the box

ColorBlast 6 or ColorBlast 12 fixture
(2) 8-32 screws for indoor installation
(4) 10-24 stainless steel screws for outdoor installation
Watertight grommet assembly
3/32 in hex key wrench for fixture positioning and locking
Junction box gasket
Installation Instructions

ColorBlast fixtures

ColorBlast 6 and ColorBlast 12 fixtures are part of a complete system which includes:

- One or more power / data supplies
- Any Philips controller, including Light System Manager and iPlayer 3, or a third-party DMX controller

Item	Type	Housing Color	Item Number	Philips 12NC
ColorBlast 12	22° Beam Angle	White	116-000025-00	910503700589
	10° Beam Angle		116-000025-02	910503700591
	22° Beam Angle	Black	116-000025-01	910503700590
	10° Beam Angle		116-000025-03	910503700592
ColorBlast 6	21° Beam Angle	White	116-000026-00	910503700593
	10° Beam Angle		116-000026-02	910503700595
	21° Beam Angle	Black	116-000026-01	910503700594
	10° Beam Angle		116-000026-03	910503700596


Power / data supplies

PDS-150e 24V	DMX / Ethernet	109-000008-01	910503700092
PDS-60 24V	Pre-programmed	109-000017-00	910503700096
	DMX / Ethernet	109-000017-03	910503700097

Use Item Number when ordering in North America

Typical ColorBlast installation

For detailed wiring diagrams visit www.philipscolorkinetics.com/support/wiring/ls_prod.html

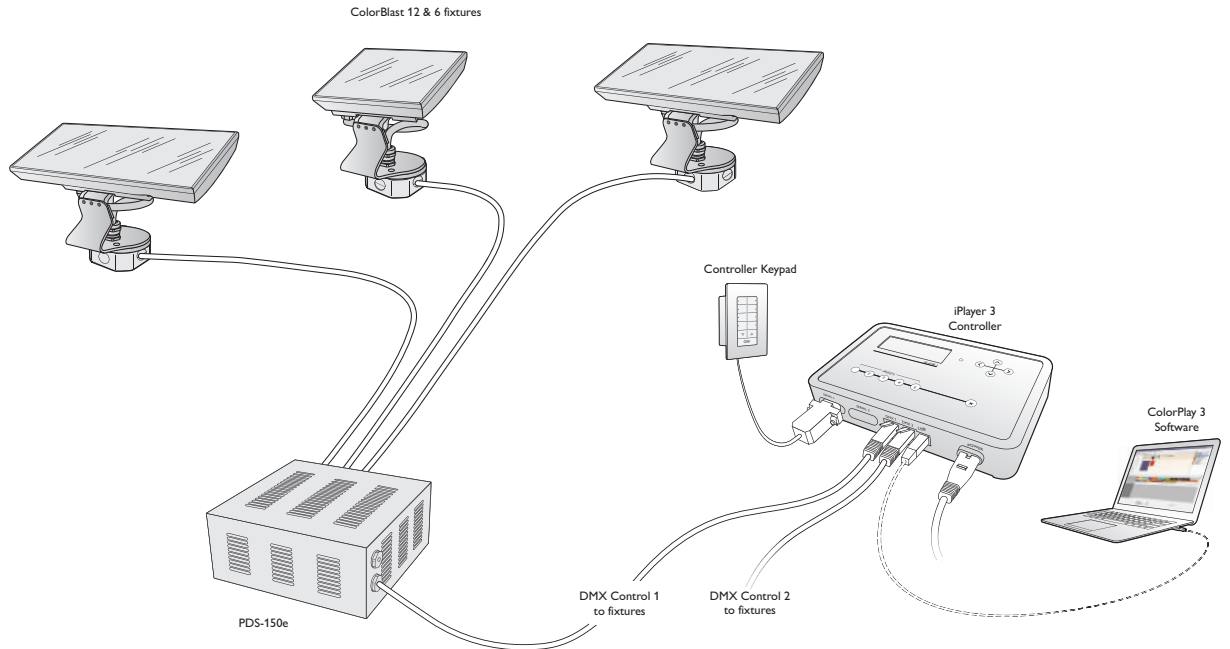

Accessories

Designed specifically for the family of Blast fixtures, accessories provide additional options for controlling and dispersing light. Accessory holders snap to the front of the fixture and are required for mounting accessories. Accessory holders prevent accessories from falling out if the fixture is tipped or hung upside down.

Item	Type	Housing Color	Item Number	Philips 12NC	
Accessory Holders	ColorBlast 12	White	120-000003-03	910503702839	
		Black	120-000003-04	910503702840	
	ColorBlast 6	White	120-000004-03	910503702841	
		Black	120-000004-04	910503702842	
Half Top Hats	ColorBlast 12	White	120-000009-03	910503702847	
		Black	120-000009-04	910503702848	
	ColorBlast 6	White	120-000010-03	910503702849	
		Black	120-000010-04	910503702850	
Top Hats	ColorBlast 12	White	120-000005-03	910503702843	
		Black	120-000005-04	910503702844	
	ColorBlast 6	White	120-000006-03	910503702845	
		Black	120-000006-04	910503702846	
Egg Crate Louvers	ColorBlast 12	White	120-000015-03	910503702851	
		Black	120-000015-04	910503702852	
	ColorBlast 6	White	120-000016-03	910503702853	
		Black	120-000016-04	910503702854	
Barndoors	ColorBlast 12	White	120-000019-03	910503702855	
		Black	120-000019-04	910503702856	
	ColorBlast 6	White	120-000020-03	910503702857	
		Black	120-000020-04	910503702858	
Horizontal Glass Spread Lens*	ColorBlast 12	36° (ribs out) / 50° (ribs in)	120-000025-00	910503703897	
	ColorBlast 6	36° (ribs out) / 50° (ribs in)	120-000026-00	910503703899	
Horizontal / Vertical Glass Spread Lens*	ColorBlast 12	40°	120-000025-01	910503703898	
	ColorBlast 6	40°	120-000026-01	910503702772	

* Intended for use with Blast fixtures with 10° clear lens

Use Item Number when ordering in North America.

✱ Refer to the ColorBlast 6 and ColorBlast 12 Installation Instructions for specific warning and caution statements.

Installation

ColorBlast offers rich, saturated wall-washing color and color-changing effects, both indoors and outdoors. Both ColorBlast 12 and ColorBlast 6 are low-voltage fixtures, intended for use with the power / data supplies PDS 150e 24V and PDS-60 24V from Philips Color Kinetics.

Owner / User Responsibilities

It is the responsibility of the contractor, installer, purchaser, owner, and user to install, maintain, and operate ColorBlast fixtures in such a manner as to comply with all applicable codes, state and local laws, ordinances, and regulations. Consult with the appropriate electrical inspector to ensure compliance.

Installing in Wet or Damp Locations

When installing in wet or damp locations, it is good practice to seal all fixtures and junction boxes with electronics-grade RTV silicone sealant to ensure that moisture cannot enter or accumulate in wiring compartments, cables, or other electrical parts. You must use suitable outdoor-rated junction boxes when installing in wet or damp locations. Additionally, you must use gaskets, clamps, and other parts required for installation to comply with all applicable local and national codes


Create a Lighting Design Plan and Layout Grid

1. Determine the appropriate location of each power / data supply in relation to the fixtures, and of the fixtures in relation to each other. Refer to the power / data supply's Installation Instructions or Specification Sheet for guidelines on configuring and positioning the power / data supply in relation to the controller.

With the native 60 ft (18.3 m) power / data cable supplied with each fixture, you can connect up to three ColorBlast 12 fixtures to each PDS-150e, or one ColorBlast 12 fixture to each PDS-60. You can connect up to six ColorBlast 6 fixtures to each PDS-150e, or up to two ColorBlast 6 fixtures to each PDS-60. Using 18 AWG, 3-conductor stranded copper wire, you can extend the cable for each individual fixture to a maximum length of 150 ft (45.7 m), as long as the total cable length for each power / data supply does not exceed 400 ft (121.9 m).

2. On an architectural diagram or other diagram that shows the physical layout of the installation, identify the locations of all switches, controllers, power supplies, fixtures, and cables.
3. Each ColorBlast fixture comes pre-programmed with a unique serial number. As you unpack the fixtures, record the serial numbers in a layout grid (typically a spreadsheet or list) for easy reference and light addressing.
4. Assign each fixture to a position in the lighting design plan.
5. To streamline installation and aid in light show programming, you can affix a weatherproof label identifying the order or placement in the installation to an inconspicuous location on each light fixture's housing.

Record fixture serial numbers

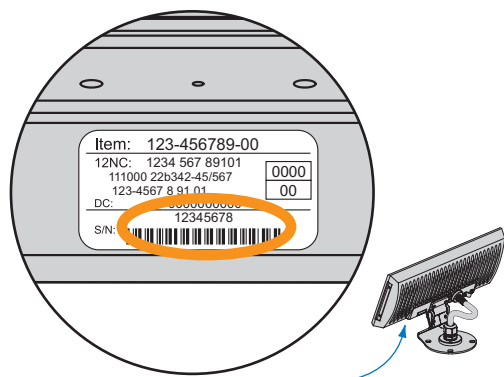

✱ For complete instructions on how to wire the power / data supply, refer to the specific power / data supply's Installation Guide or Specification Sheet. For sample wiring diagrams, visit www.philipscolorkinetics.com/support/wiring/ls_prod.html

Start the Installation

1. Install all power / data supplies, including any interfaces with controllers. Power / data supplies and external controllers send power and control signals to the fixtures over the single fixture cable.
2. Ensure that the number of free power / data supply power ports is adequate.
3. Verify that all additional supporting equipment (switches, controllers) is in place.


4. Ensure that all additional parts and tools are available, including:
 - The included 8-32 screws for indoor installations, or the 10-24 stainless steel screws for outdoor installations
 - The included 3/32 in hex key wrench
 - The included junction box gasket (optional)
 - Unless mounting directly to a wall, ceiling, or other surface, one 4 in (102 mm) round US electrical junction box per fixture, rated for your application, with 3.5 in (89 mm) center-to-center screw holes for attaching the fixture's base. (Refer to the junction box manufacturer's literature for additional items required for mounting or sealing.)
 - Conduit as required
 - Contractor-grade room temperature vulcanizing (RTV) silicone sealant

Install the Fixtures

If installing ColorBlast fixtures indoors, you can mount the fixtures directly to a wall, ceiling, or other suitable surface. For outdoor installations, and optionally for indoor installations, you install ColorBlast fixtures to a junction box. In wet or damp locations, you must ensure that all junction boxes are suitable for the environment and sealed, if necessary.

Mounting ColorBlast Directly to a Surface

1. Determine the fixture mounting locations as specified in the lighting design plan.
2. Ensure that the fixture sits flush to the mounting surface.
3. Using the provided 8-32 screws, attach the fixture to the mounting surface.

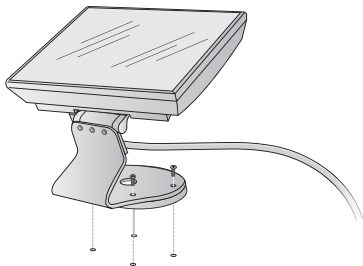


4. Repeat steps 2 and 3 for each fixture in the installation.


Mounting ColorBlast to a Junction Box

1. Mount junction boxes in accordance with the lighting design plan. Each fixture is designed for mounting in a 4 in (102 mm) round US electrical junction box, rated for your application, with 3.5 in (89 mm) center-to-center screw holes for attaching the fixture's base.
2. Screw the included grommet assembly into the fixture's base. If installing in a wet or damp location, seat the O-ring securely against the opening in the fixture base to ensure a watertight seal.
3. Insert the fixture cable through the grommet's dome nut, loosening the dome nut if necessary, and the fixture's base. Leave enough cable above the dome nut to allow full fixture rotation.
4. Tighten the dome nut to seal the cable. After 24 hours, tighten the dome nut again to ensure a proper seal.

ColorBlast 6

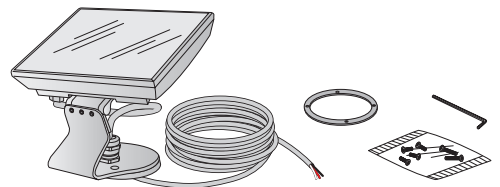


ColorBlast 12

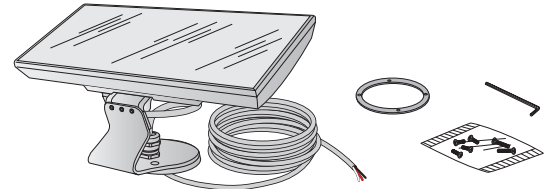


Included in the box

ColorBlast 6 or ColorBlast 12 fixture
(2) 8-32 screws for indoor installation
(4) 10-24 stainless steel screws for outdoor installation
Watertight grommet assembly
3/32 in hex key wrench for fixture positioning and locking
Junction box gasket
Installation Instructions


⚠ If installing in a wet or damp location, you must mount fixtures to outdoor-rated junction boxes, as described below.

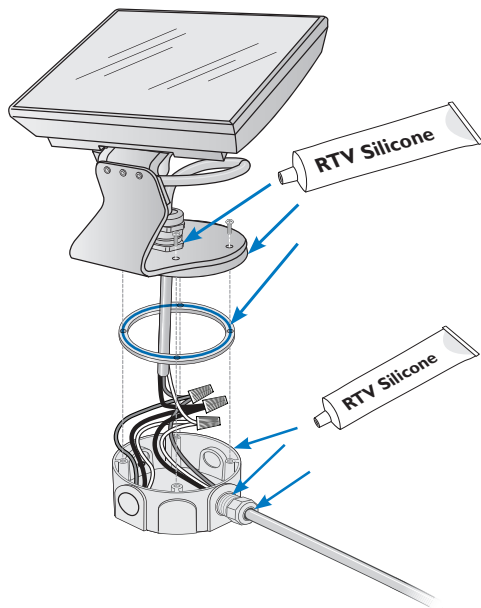

Fixture cable connector dimensions



ColorBlast 12 wiring

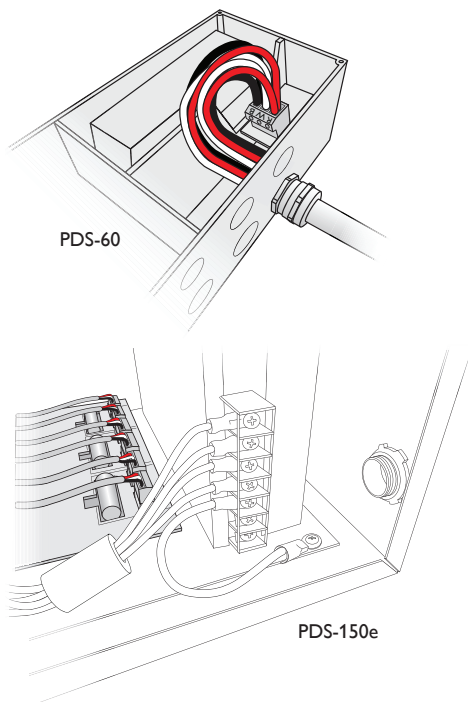


5. Insert the fixture cable through the provided junction box gasket, and pull the cable through the junction box.
6. If installing in a wet or damp location, seal all junction boxes with contractor-grade RTV silicone sealant. Use gaskets, clamps, and other parts and fittings required to comply with local outdoor wiring codes.
7. Using the provided 10-24 stainless steel screws, attach the fixture base to the junction box, ensuring that the gasket is compressed evenly.
8. Repeat steps 2 through 7 for each fixture in the installation.

Make Power Connections


Make sure the power is OFF before mounting and connecting ColorBlast fixtures.

1. Pull cables from the fixtures to the power / data supply.
2. Pull each fixture cable through a knockout in the side of the power / data supply.
3. Connect line, common, ground, and data to a provided connector, then snap the connector into the connector terminal inside the power / data supply housing.

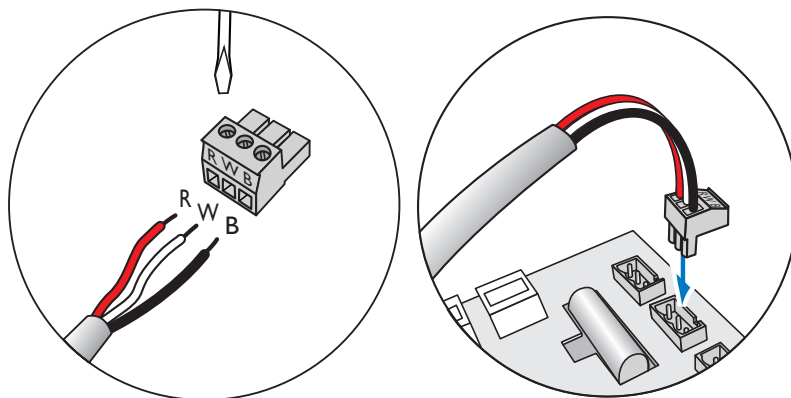

4. Using wire nuts, connect the green ground wire from each fixture cable to the earth ground on the power / data supply,

ColorBlast 6 wiring

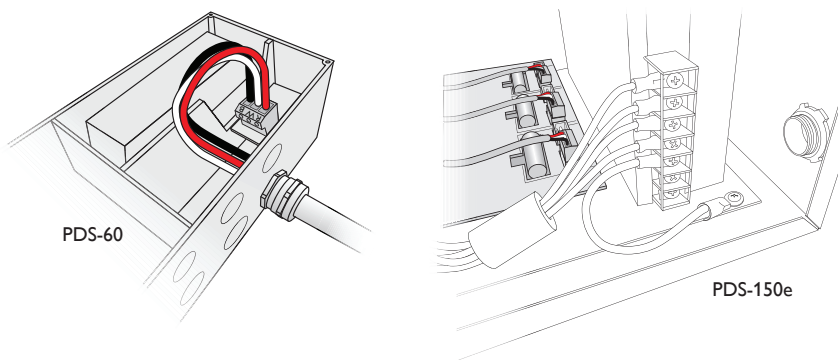

4. Repeat for each power / data supply in your installation.

Attach Safety Cable (Optional)

Each ColorBlast fixture is designed for use with a safety cable to tether it to a secure anchor point. When dictated by local or state code or advised by a structural engineer, attach a safety cable to the bracket on the back of the fixture. Remove the two screws that attach the cable bracket, loop the safety cable over the cable bracket, and reattach to the fixture. Attach the safety cable to the mounting surface using a method that follows the code or engineer's requirements.

Address and Configure the Fixtures

Make sure the power is ON before addressing and configuring fixtures.

Each ColorBlast fixture uses three sequential DMX channels or addresses, one for red, one for green, and one for blue. ColorBlast fixtures come factory-addressed to DMX channels 1 (red), 2 (green), and 3 (blue).


For lighting designs where fixtures work in unison, all fixtures can be assigned the same DMX addresses. Changes to the default addresses are not necessary, but if lights were previously readdressed for use in other installations, you must reset them. For light show designs that show different colors on different fixtures, you must assign unique DMX addresses to your fixtures and sort them in a useful order.

- In Ethernet installations, you can address and configure your fixtures using QuickPlay Pro with a computer connected to your lighting installation's network. QuickPlay Pro can automatically discover all of your fixtures, controllers, and Data Enabler Pro devices for quick configuration.
- In DMX installations, you can address and configure your fixtures using QuickPlay Pro with iPlayer 3 or SmartJack Pro. You can manually enter fixture serial numbers, or you can import a spreadsheet listing each fixture's serial number and starting DMX address.


For complete details on addressing and configuring fixtures, controllers, and power / data supplies with QuickPlay Pro, refer to the *Addressing and Configuration Guide*, which you can view or download at www.philipscolorkinetics.com/support/addressing.

Aim and Lock the Fixtures

Using the provided 3/32 in hex key wrench, loosen the rotation and tilting set screws. Aim the fixtures by rotating the base and tilting the beam as desired. Tighten the two pairs of set screws to lock the fixture in place.

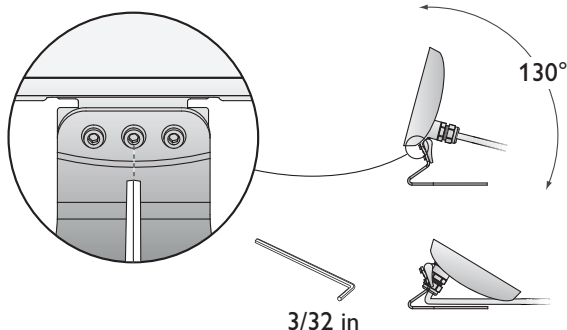

Safety cable bracket location on fixture

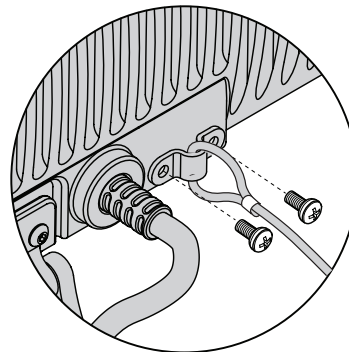

Safety cable minimum requirements

Material	316 Stainless Steel
Size	5/64 to 3/16 in (2 to 5 mm) nominal diameter. Minimum break load must be greater than 400 lb (181 kg)
Construction	7 x 7 (49 wires) preformed stranded

* You can download QuickPlay Pro from www.philipscolorkinetics.com/support/addressing/

* You will need the layout grid that you created when you recorded the serial numbers of the light fixtures in your installation.

* Do not look directly into the fixture when aiming and locking.



Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com

Copyright © 2009 – 2012 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DILMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.
Cover Photo: Soundbar, courtesy of Michael Dreas

DAS-000034-00 R03 04-12