

COMMERCIAL LED RECESSED DOWNLIGHT RETROFITS



Certification

c-UL-us DAMP LOCATION


Features

- 6" Replace up to 2x
- 18W CFLs per Fixture
- 8" Replace up to 2 x 26W CFLs per fixture
- External driver for simple retrofitting
- Quick connect feature for easy installation
- 120-277 range voltage circuit
- 0-10V dimming
- 90CRI
- Wet location
- c-UL-us Classified
- Energy Star Certified


Application

- Office
- Retail
- Hospitality
- Manufacturing

6" LED Commercial Recessed Downlight Retrofits

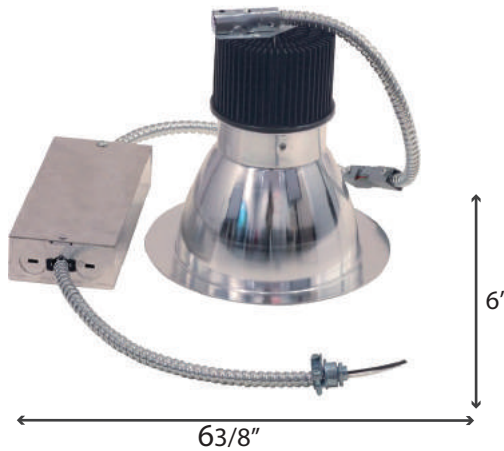

8" LED Commercial Recessed Downlight Retrofits

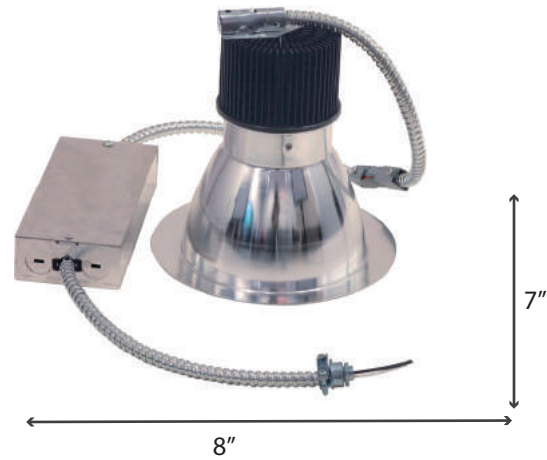

LED Commercial Recessed Downlight Retrofits

| Product # | Lam Description | Watt | Voltage | CRI | CCT | Life/Hrs | Lumens | BM | M.O.L. (Inches) | UPC |
|-----------|---------------------------|------|---------|-----|-------|----------|--------|-----|-----------------|--------------|
| S9794 | 20WLED/CDL/6/30K/120-277V | 20 | 120-277 | 90 | 3000K | 50K | 1500 | 40° | 6 | 045923097942 |
| S9795 | 30WLED/CDL/6/30K/120-277V | 30 | 120-277 | 90 | 3000K | 50K | 2000 | 40° | 6 | 045923097959 |
| S9796 | 20WLED/CDL/8/30K/120-277V | 20 | 120-277 | 90 | 3000K | 50K | 1500 | 40° | 8 | 045923097966 |
| S9797 | 30WLED/CDL/8/30K/120-277V | 30 | 120-277 | 90 | 3000K | 50K | 2000 | 40 | 8 | 045923097973 |