

SMALLEST COMPACT LED EXIT SIGNS


SEARCH CODE: SC7160



ELECTRICAL:

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Ultra bright, energy efficient, long life Red or Green LEDs.

DIMENSIONS:

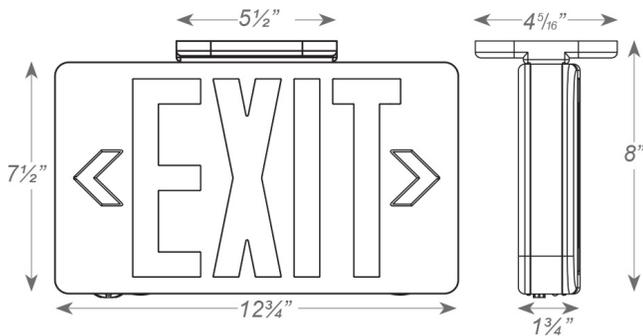

WARRANTY & LISTINGS:

- 5-year warranty
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

MOUNTING:

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.
- Compact, low-profile design.

SPECIFICATIONS:

Product Code	Housing	Letter Color	Battery Back-up
EZRXTU-3-R-W-EM	White	Red	Yes
EZRXTU-3-R-W	White	Red	No
EZRXTU-3-R-B-EM	Black	Red	Yes
EZRXTU-3-R-B	Black	Red	No
EZRXTU-3-G-W-EM	White	Green	Yes
EZRXTU-3-G-W	White	Green	No
EZRXTU-3-G-B-EM	Black	Green	Yes
EZRXTU-3-G-B	Black	Green	No
EZRXTU2RGW	White	Selectable Red/Green	No
EZRXTU2RGB	Black	Selectable Red/Green	No
EZRXTU2RGWEM	White	Selectable Red/Green	Yes
EZRXTU2RGBEM	Black	Selectable Red/Green	Yes