

Bullet Landscape LED Flood Lights

Search Code: SC7269



FEATURES

- **Durable Construction:** Die-cast aluminum housing with a bronze powder coat Finish.
- **Optical lens:** polycarbonate high light transmittance lens, anti-UV, low glare, fire-resistant.
- **Versatile Applications:** Suitable for residential and commercial settings.
- **Wet Location Rated.**
- **Quick and easy installation** with two mounting options.
- **Customizable Settings:** Available in multiple wattages and color temperatures.
- **Beam Angle:** 60° and (25° Narrow-Beam Angle for the 84W Models).
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC
- **Total Harmonic Distortion (THD):** ≤ 20%
- **Operating humidity:** 20%-90% RH
- **CRI:** ≥80.
- **Power Factor:** >0.9.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz
- **LED:** Philips LUMILEDs



WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL, cULus for wet locations


MOUNTING

- Available in 1/2" knuckle or Trunion mounts.

ACCESSORIES

- Optional Shroud, stake, or wall mount.

DIMENSIONS

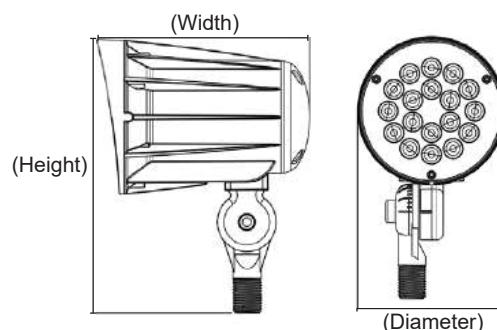

ORDERING INFORMATION

Product Code	Wattage	Replaces	Lumens	Color Temperature	Mounting	Dimensions
FLD2-15CW-KN	15W	100W MH	1500L	5000K Daylight	1/2 Knuckle Mount	5.25"(H) x 3"(D) x 4.25"(W)
FLD2-15WW-KN	15W	100W MH	1500L	3000K Soft White	1/2 Knuckle Mount	5.25"(H) x 3"(D) x 4.25"(W)
FLD2-15WW-TR	15W	100W MH	1500L	3000K Soft White	Trunion Mount	5"(H) x 3"(D) x 4.25"(W)
FLD2-28CW-KN	28W	150W MH	2800L	5000K Daylight	1/2 Knuckle Mount	7.25"(H) x 4"(D) x 5.75"(W)
FLD2-28WW-KN	28W	150W MH	2800L	3000K Soft White	1/2 Knuckle Mount	7.25"(H) x 4"(D) x 5.75"(W)
FLD2-28CW-TR	28W	150W MH	2800L	5000K Daylight	Trunion Mount	7.75"(H) x 4"(D) x 5.75"(W)
FLD2-28WW-TR	28W	150W MH	2800L	3000K Soft White	Trunion Mount	7.75"(H) x 4"(D) x 5.75"(W)
FLD2-42CW-KN	42W	250W MH	4200L	5000K Daylight	1/2 Knuckle Mount	8"(H) x 4.25"(D) x 6.25"(W)
FLD2-42WW-KN	42W	250W MH	4200L	3000K Soft White	1/2 Knuckle Mount	8"(H) x 4.25"(D) x 6.25"(W)
FLD2-42CW-TR	42W	250W MH	4200L	5000K Daylight	Trunion Mount	8"(H) x 4.5"(D) x 6.25"(W)
FLD2-42WW-TR	42W	250W MH	4200L	3000K Soft White	Trunion Mount	8"(H) x 4.5"(D) x 6.25"(W)
FLDFP-84W-30K-BR	84W	500W MH	9000L	3000K Soft White	1/2 Knuckle Mount	9.3"(H) x 6"(D) 8.5"(W)
FLDFP-84W-50K-BR	84W	500W MH	9000L	5000K Daylight	1/2 Knuckle Mount	9.3"(H) x 6"(D) 8.5"(W)