

# Color Selectable LED Flat Panel Lighting

Search Code: SC9605



## STANDARD



### FEATURES

- *High Efficiency: Up to 135 lm/W.*
- *Durable Construction: Sleek ultra-thin modern design.*
- *Versatile Applications: Suitable for commercial and residential settings.*
- *Dimmable Options: 0-10v smooth dimming compatibility.*
- *Customizable Settings: Available in multiple wattages and color temperatures.*
- *Quick and easy installation.*
- *Long Lifespan: Rated for up to 50,000 operational hours.*

### ELECTRICAL

- *Voltage: 120V-277V.*
- *Efficacy: Up to 135 lm/W.*
- *Power Factor: > 0.9.*
- *Current (mA): 1050mA 36VDC/DLC.*
- *Total Harmonic Distortion (THD): < 15%.*
- *Operating Temperature Range: 0°F -104°F.*
- *Frequency Range: 50Hz~60Hz.*

### APPLICATION

- *Offices & Conference Rooms.*
- *Retail Stores & Showrooms.*
- *Hospitals & Healthcare Facilities.*
- *Schools & Universities.*
- *Hallways & Entryways.*
- *Kitchens & Living Spaces.*



### WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL, cULus for damp locations and insulated ceilings (Type IC- rated), DLC Listed.*


### MOUNTING OPTIONS

- *Standard mounting options include recessed mouting in grid ceilings, or suspended mounting using attached hanging brackets for mounting in plaster or other hard ceilings.*

### ACCESSORIES

- *Suspension Hanging Kit.*
- *Surface Mount Kit.*
- *Recessed Sheet Rock Kit.*

### DIMENSIONS

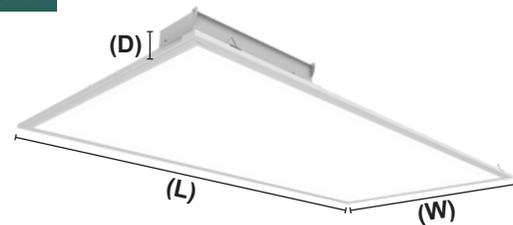

Model	Length	Width	Depth
1'x4'	48"	12"	1.8"
2'x2'	24"	24"	2"
2'x4'	48"	24"	2"

## ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature
LPNG-1X4-MCTP	1'x4'	Wattage Select 30W/25W/20W	3750L MAX	Color Select 35K/40K/50K
LEDPNL2X2-42MW-MCT	2'x2'	42W	4000L	Color Select 30K/40K/50K
LPNG-2X2-MCTP	2'x2'	Wattage Select 30W/25W/20W	4400L	Color Select 35K/40K/50K
LPNG-2X4-MCTP	2'x4'	Wattage Select 50W/40W/30W	5000 MAX	Color Select 35K/40K/50K