

# LED Flat Panel



2x2



1x4



2x4

## Certifications



## Application

- Perfect for commercial grid ceiling applications
- Lightweight extruded aluminum housing
- Opal lens provides uniform light distribution
- Integrated LED
- 0-10V Dimmable

## Specifications

- 120-277V
- Powdercoat finish in white
- Diffused lens for uniform light distribution & no hot spots, low glare
- Fully sealed for LED protection
- 0-10V Dimming
- 5-year warranty
- Rating IP20
- Efficacy up to 144LM/W
- DLC & UL listed

## Specifications


Product #	Watts	Lumens	Color Temp	Dimensions
LPBP-14-26W-35K	26W	3500LM	3500K	1'X4'
LPBP-22-26W-35K	26W	3500LM	3500K	2'X2
LPBP-24-51W-35K	51W	7200LM	3500K	2'X4'
LPBP-14-26W-40K	26W	3500LM	4000K	1'X4'
LPBP-22-26W-40K	26W	3500LM	4000K	2'X2
LPBP-24-51W-40K	51W	7200LM	4000K	2'X4'

2' x 2'


1' x 4'

2' x 4'

**LUMINOUS OPENING POINT**  
 MAX CD: 1,306.1 AT HORIZONTAL: 0°, VERTICAL: 5°  
 CUTOFF CLASS: CUTOFF  
 ROADWAY CLASS: TYPE VS  
 EFFICIENCY: 99.9%



**LUMINOUS OPENING POINT**  
 MAX CD: 1,030.7 AT HORIZONTAL: 0°, VERTICAL: 5°  
 CUTOFF CLASS: CUTOFF  
 ROADWAY CLASS: TYPE VS  
 EFFICIENCY: 99.9%

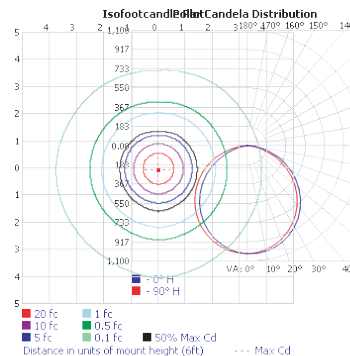

**LUMINOUS OPENING POINT**  
 MAX CD: 2,373.3 AT HORIZONTAL: 0°, VERTICAL: 5°  
 CUTOFF CLASS: CUTOFF  
 ROADWAY CLASS: TYPE VS  
 EFFICIENCY: 99.9%

