

LED Designer Canopy Lights



Certifications



Specifications

- CRI 70
- UL listed for wet location
- DLC qualified at 5000K
- LM-80 certified high performance LEDs
- Voltage is 120-277V
- Die-cast aluminum housing with black, white or dark bronze powder coat finish
- Pendant or surface mount
- Suitable for use in -40°C to 40°C
- 5-year warranty

Accessories



Emergency Battery



Motion Sensor

45W, 65W, 80W



45W & 65W Dimensions

Length	9.57"
Width	9.57"
Depth	3.07"

80W Dimensions

Length	14.38"
Width	14.38"
Depth	3.5"

30W,45W, 60W



30W,45W,60W Dimensions

Diameter	11"
Depth	3"


Specifications

Product #	Lumens	Color Temp	Color	Accessories	Watts	Replaces	Shape
RCM30W27V50KWDF	3,550 LM	5000K	Black/White	EM/MS	30W	100W MH	Round
RCM45W27V50KWDF	4,850 LM	5000K	Black/White	EM/MS	45W	100W MH	Round
RCM60W27V50KWDF	6,150 LM	5000K	Black/White	EM/MS	60W	175W MH	Round
7802CLWH028	4,200 LM	5000K	White	EM/MS	45W	100W MH	Square
7802CLBL036	4,200 LM	5000K	Black	EM/MS	45W	100W MH	Square
7802CLWH070-51K	6,600 LM	5000K	White	EM/MS	65W	175W MH	Square
7802CLBL070-51K	6,600 LM	5000K	Bronze	EM/MS	65W	175W MH	Square
PVR80LEDMV-50	9,700 LM	5000K	Bronze	None	80W	250W MH	Square

Choose Your Optical Distribution

The general distribution allows a wash of light in any application. In addition, we design an optics for parking garage.

General

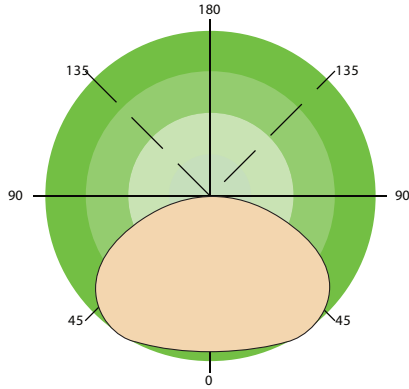

Parking Garage

