

LED Area Post Light Fixture

Search Code: SC43739



FEATURES

- *High Efficiency: Up to 150 lm/W (On Select Models).*
- *Durable Construction: Die-Cast Aluminum housing with a bronze powder coat finish.*
- *Dimmable Options: 0-10v dimming. Requires low voltage dimmers.*
- *Versatile Applications: Suitable for commercial and residential settings.*
- *Customizable Settings: Tunable wattages and color selectable temperatures. Power selectable switch inside fixture.*
- *Super bright LEDs: SMD 3030.*
- *Long Lifespan: Rated for up to 50,000 operational hours.*

ELECTRICAL

- *Input Voltage: 120V-277VAC.*
- *Total Harmonic Distortion (THD): ≤ 20%*
- *CRI: >70.*
- *Power Factor: 0.95.*
- *Operating Temperature Range: (-17°C to 40°C) 0°F to 104°F.*
- *Frequency Range: 50Hz~60Hz.*



WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL cUL Listed, ETL Listed, Wet location Rated.*

MOUNTING

- *Multiple mounting options from poles, to wall, to suspension.*

APPLICATIONS

- *Parking Lots and Garages.*
- *Campus and Pathway Lighting.*
- *Parks and Recreational Areas.*
- *Commercial Outdoor Spaces.*
- *Architectural and Landscape Lighting.*

ORDERING INFORMATION


Product Code	Wattage	Lumens	Color Temperature	Mount
RAL60-MCTP-A1	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Single Arm Mount For 2-3/8 Inch Poles
RAL60-MCTP-A2	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Double Arm Mount For 2-3/8 Inch Poles
RAL60-MCTP-PWM	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Pole/Wall Mount
RAL60-MCTP-SF	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Slipfitter Mount For 2-3/8 Inch Poles
RAL60-MCTP-BM	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Bell Arm Mount For 2-3/8 Inch Poles
RAL60-MCTP-CM	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Ceiling Mount
RAL60-MCTP-PM75	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Pipe Mount with 3/4" Hub
RAL60-MCTP-CAT	18W/30W/45W/60W	Max 9000 LM	30K/40K/50K	Catenary Suspension Mount
RAL75-MCTP-A1	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Single Arm Mount For 2-3/8 Inch Poles
RAL75-MCTP-A2	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Double Arm Mount For 2-3/8 Inch Poles
RAL75-MCTP-PWM	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Pole/Wall Mount
RAL75-MCTP-SF	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Slipfitter Mount For 2-3/8 Inch Poles
RAL75-MCTP-BM	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Bell Arm Mount For 2-3/8 Inch Poles
RAL75-MCTP-CM	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Ceiling Mount
RAL75-MCTP-PM75	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Pipe Mount with 3/4" Hub
RAL75-MCTP-CAT	22W/37W/56W/75W	Max 10,200 LM	40K/50K	Catenary Suspension Mount

LED Area Post Light Fixture

Search Code: SC43739




AI DIMENSIONS

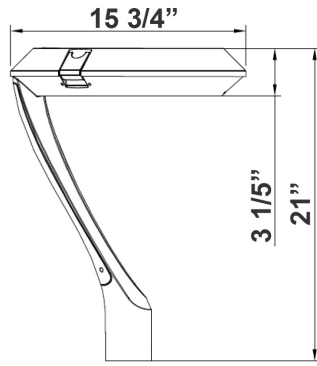


(W) 15 3/4" x (H) 21"
Inside Diameter: 2 3/4"

A2 DIMENSIONS

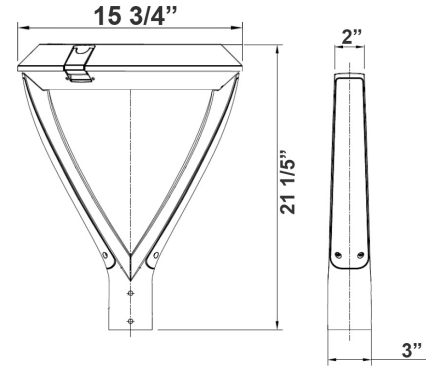


(D) 15 3/4" x (H) 21 1/5"
Inside Diameter: 3"

BM DIMENSIONS

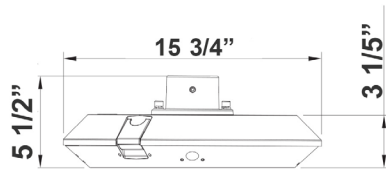


(W) 5 1/2" x (H) 5 1/2"

CAT DIMENSIONS

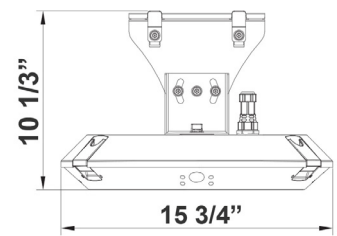


(W) 15 3/4" x (H) 10 1/3"

CM DIMENSIONS

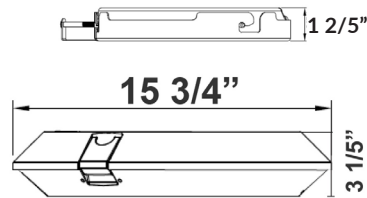


(W) 15 3/4" x (H) 4 3/5"

PM DIMENSIONS

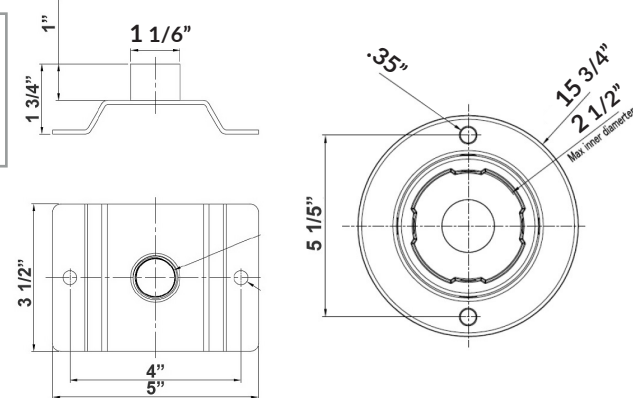


(W) 15 3/4" x (D) 3" x (H) 1/2"

CM DIMENSIONS

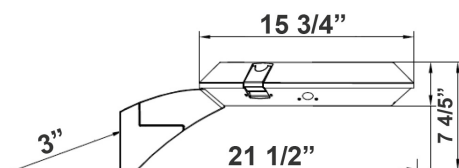

(W) 21 1/2" x (H) 7 4/5"

SF DIMENSIONS

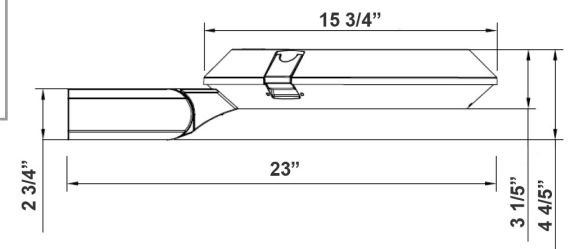

(W) 23" x (H) 4 4/5"
Inside Diameter: 2 3/4"