

LED UPLIGHT WALL PACKS

SEARCH CODE: SC33145




FEATURES:

- High Light Transmittance, Anti-UV and Fire Resistant PC lens
- Finish: Available in a Dark Bronze finish
- Die-cast aluminum housing with powder coat finish
- Two 1/2" Knockouts on Each Side
- Multi CCT and Power (Switches are inside fixture)
- 0-10V Dimmable
- DC Button Photocell with ON/OFF switch Included
- Light Head Can Be Adjusted From 0° to 90°
- Full Cutoff, Dark Sky Compliant
- Install upside down to create an uplight wall wash effect



DIMENSIONS:

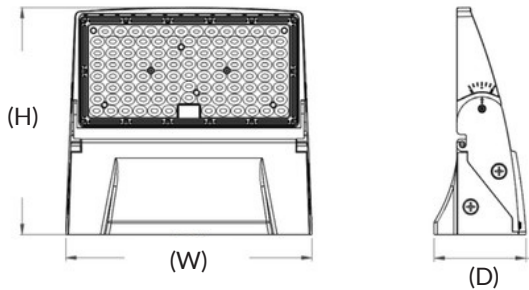


WARRANTY & LISTINGS:

- 5-year warranty
- UL / cUL Certified
- IP65 Waterproof
- 50,000 hours

ELECTRICAL:

- Operating Temp: 0°F to 113° F
- Color Temperatures: 3000K/4000K/5000K
- Lumileds 2835, High CRI
- Color Rendering Index: CRI ≥ 80
- Beam Angle: H127° x V85°
- 120-277V AC 60Hz

PHOTOMETRICS:

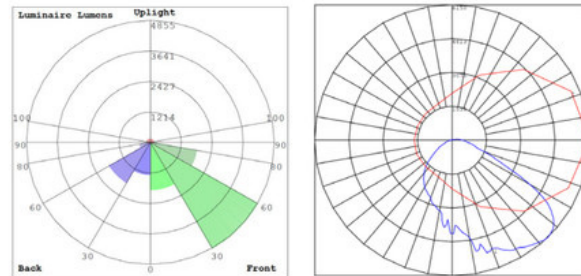

BUD Rating: B3-U3-G3

APPLICATION:

- Walkways and Pathways
- Parking Lots
- Entryways and Exits
- Loading Docks
- Landscaping

SPECIFICATIONS:

Product Code	Wattage	Dimensions
9519CGBZ040MW-MCT	Selectable 40W/30W/20W	14" (W) x 12 8/9" (H) x 5 1/4" (D)
9519CGBZ080MW-MCT	Selectable 80W/65W/50W	14" (W) x 12 8/9" (H) x 5 1/4" (D)
9519CGBZ120MW-MCT	Selectable 120W/105W/90W	14" (W) x 12 8/9" (H) x 5 1/4" (D)