

# Color Selectable Traditional LED Wall Packs

Search Code: SC43869



## STANDARD



## FEATURES

- *High Efficiency: Up to 145 lm/W.*
- *Durable Construction: Die-Cast Aluminum housing. Glass Lens.*
- *Versatile Applications: Suitable for commercial and residential settings.*
- *Dimmable Options: Smooth dimming compatibility with leading-edge dimmers.*
- *Customizable Settings: Available in multiple wattages and color temperatures.*
- *Integrated photocell for dusk to dawn operation.*
- *IP Rating: Waterproof and dustproof (IP65 rated).*
- *Long Lifespan: Rated for up to 50,000 operational hours.*

## ELECTRICAL

- *Voltage: 120V-277V Input Voltage.*
- *Wattage: Available in 46W, 80W, 120W and 150W models.*
- *Power Factor: > 0.9.*
- *CRI: > 80*
- *Total Harmonic Distortion (THD): < 20%.*
- *Operating Temperature Range: -17°C to 50°C (0°F to 122°F).*




## WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL Listed, Energy Star Certified, DLC Premium Listed.*
- *Compliance: RoHS and FCC compliant.*

## MOUNTING OPTIONS

- *4 - 1/2" knockouts makes for versatile mounting.*
- *Wall mount with or without junction box.*
- *Hinged removable door housing makes installation easier.*

## DIMENSIONS

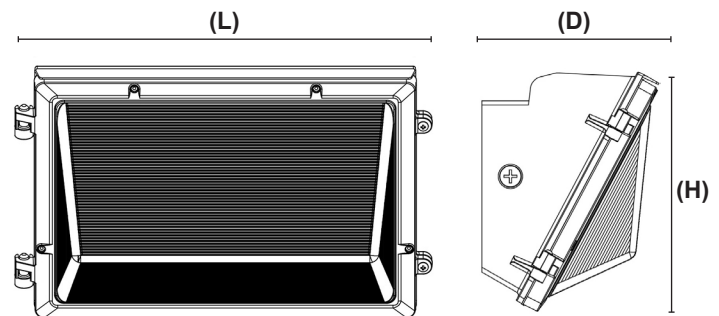

4 1/2 Knockouts



Glass Lens



J-Box or  
Direct Wall Mount for  
Surface Conduit  
(Back Mount)

Integrated Photocell

## ORDERING INFORMATION

| Product Code      | Wattage                      | Lumens | Color Temperature        | Dimensions                      |
|-------------------|------------------------------|--------|--------------------------|---------------------------------|
| 9515CGBZ046MW-MCT | Wattage Select 46W/42W/30W   | 6700L  | Color Select 30K/40K/50K | 13.11"(L) x 9.72"(H) x 5.91"(D) |
| TWP1-PS80-FCCT-U  | Wattage Select 80W/70W/60W   | 10800L | Color Select 30K/40K/50K | 14.5"(L) x 9.5"(H) x 6.5"(D)    |
| TWP1-PS120-FCCT-U | Wattage Select 120W/105W/90W | 16200L | Color Select 30K/40K/50K | 14.5"(L) x 9.5"(H) x 6.5"(D)    |
| 9515CGBZ150-50K   | 150W                         | 18000L | 5000K Daylight           | 18"(L) x 9.75"(H) 6.9"(D)       |