

LED LOW VOLTAGE BULLET FLOOD LIGHTS

QUICK SEARCH CODE: SC10495



FEATURES:

- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- 35° beam angle
- Housing: Cast aluminum with powder coat finish (Bronze)
- Mounting: 1/2" Threaded Knuckle Stem
- Choose between 3000K soft white and 5000K daylight
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency



APPLICATION:

- Gardens
- Landscaping
- Flag poles

ACCESSORIES:

- Shroud
- Wall Mount
- Stake



WARRANTY & LISTINGS:

- 5-year warranty
- UL / CUL Listed
- Wet Location Rated
- DLC

ELECTRICAL:

- Voltage: 12V AC/DC
- Operating Temp: 0 to 104°F
- CRI: >80
- Power Factor: >0.9
- Lifespan: 50,000 hours
- High Conductive Aluminum LED Board
- LED type/brand: Lumileds LEDs / SMD 3030

SPECIFICATION:



Wattage	Lumens	Equivalency	Color Temperature	Mount
6 Watt	550LM	50 INC	5000K Daylight 3000K Soft White	1/2 Knuckle Mount
12 Watt	1,300LM	100 INC	5000K Daylight 3000K Soft White	1/2 Knuckle Mount
24 Watt	2,500LM	150 HID	5000K Daylight 3000K Soft White	1/2 Knuckle Mount
32 Watt	3,500LM	250 HID	5000K Daylight 3000K Soft White	1/2 Knuckle Mount

LED LOW VOLTAGE BULLET FLOOD LIGHTS


QUICK SEARCH CODE: SC10495



6W PHOTOMETRICS:

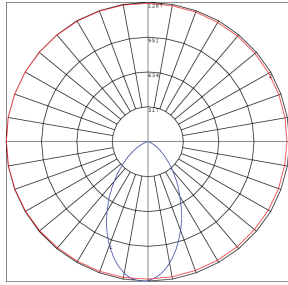
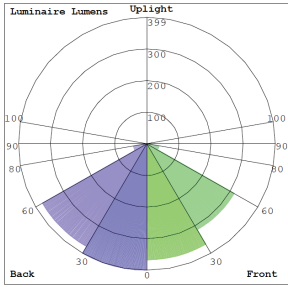


BUG Rating: B1-U1-G0

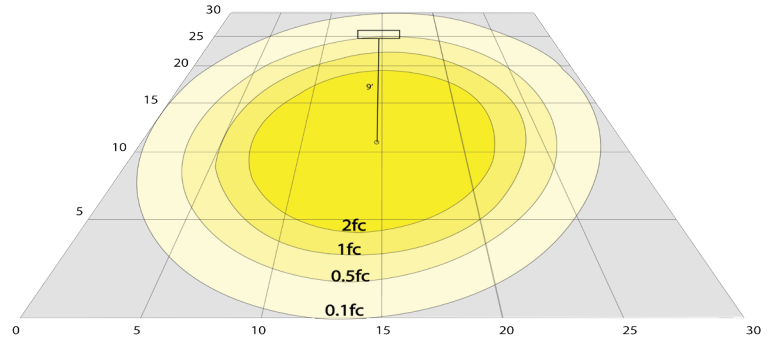


Area 30'x 30' Mounting Height: 9'

12W PHOTOMETRICS:

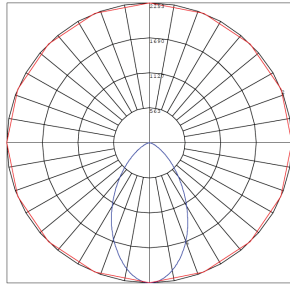
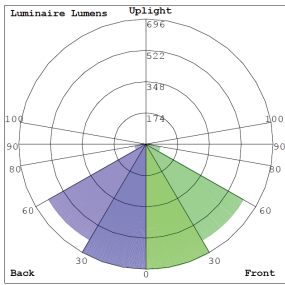


BUG Rating: B2-U1-G1

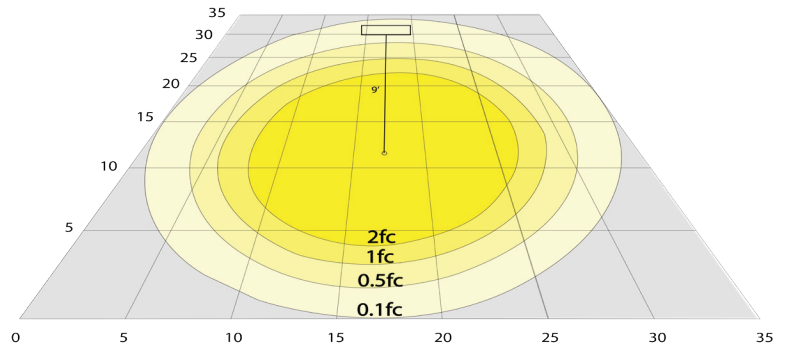


Area 35'x 35' Mounting Height: 9'

24W PHOTOMETRICS:

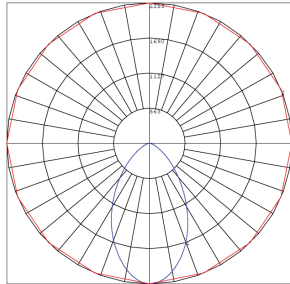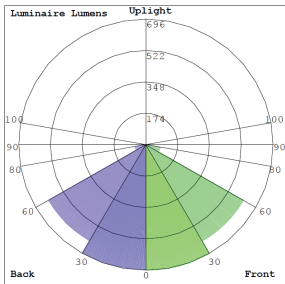

BUG Rating: B2-U1-G1

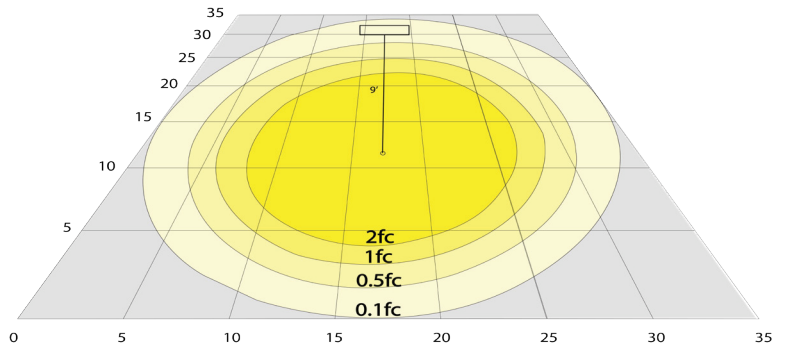




Area 35'x 35' Mounting Height: 9'

LED LOW VOLTAGE BULLET FLOOD LIGHTS

QUICK SEARCH CODE: SC10495




32W PHOTOMETRICS:

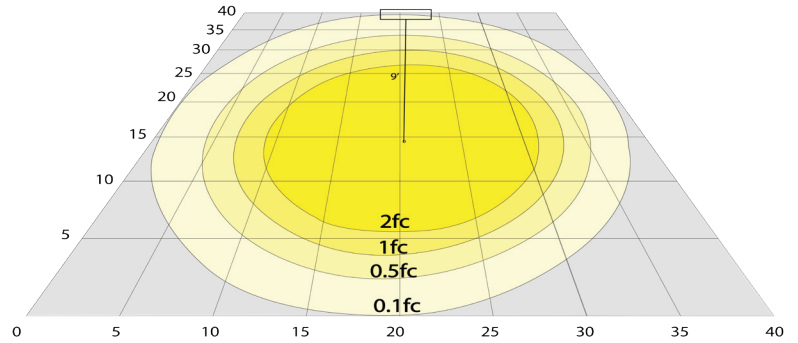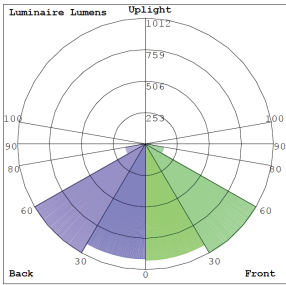


BUG Rating: B2-U1-G0

Area 40'x 40' Mounting Height: 9'

6W DIMENSIONS:

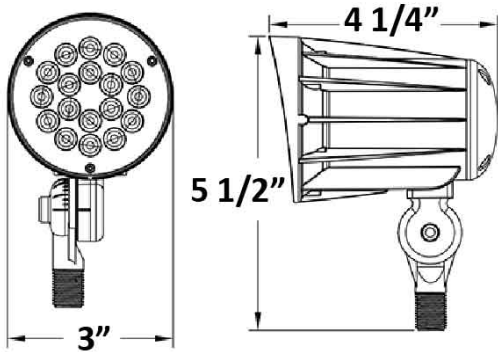

12W & 24W DIMENSIONS:

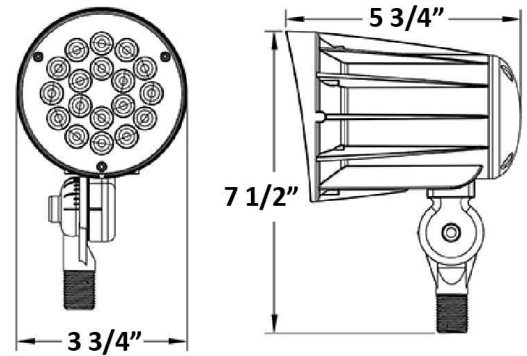

32W DIMENSIONS:

