

LED COLOR CHANGING WALL SCONCE

SEARCH CODE: SC43873



FEATURES:

Warranty & Listings

- Long lifespan of 50,000 hours. 5-year warranty
- ETL certification guarantees top quality products and safety.
- Rated for Wet Locations, suitable for indoor and outdoor projects.

Lighting Efficiency and Quality

- Efficient lighting with an acrylic lens providing a 350° beam angle for even light distribution.
- Operates on 120-277V circuits with smooth triac dimming capabilities from 10% to 100%.
- CRI: 80

Color Selectable

- Choose between 3000K Warm White, 4000K Cool White, or 5000K Daylight. RGBW on select models.

Installation

- Quick and easy installation on standard 2.75" or 3.5" outlet box.

Design

- Modern, multipurpose design with a stylish look, making it suitable for various applications like decks, front doors, porches, patios, corridors, walkways, or any other common areas.



ASD Smart App Download



* please see manual by link or QR-code below

Adding the fixture to ASD SMART APP

1. Download ASD SMART APP
2. Tap "+" in the upper-right hand corner.
3. Select "Add a device" section.
4. Follow APP instructions.
5. The fixture must be found by the APP and appear on the screen.

SPECIFICATIONS:

Product Code	Wattage	Lumens	Color Temperature	Dimensions
LEDWS-A-18D18W-MCT-BK	18W	1600LM	Color Selectable 30K/40K/50K	18" X 5-7/8"
LEDWS-A-24D24W-MCT-BK	24W	2000LM	Color Selectable 30K/40K/50K	24"X5-7/8"
LEDWS-A-36D30W-MCT-BK	30W	2350LM	Color Selectable 30K/40K/50K	36"X5-7/8"
LEDWS-A-48D36W-MCT-BK	36W	3000LM	Color Selectable 30K/40K/50K	48"X5-7/8"
LEDWS-A-72D40W-MCT-BK	40W	2600LM	Color Selectable 30K/40K/50K	72"X5-7/8"
LEDWS-A-24D18W-RGB-BK	18W	1050LM	RGBW	24"X5-7/8"
LEDWS-A-48D36W-RGB-BK	36W	1900LM	RGBW	48"X5-7/8"
LEDWS-N-18D18W-MCT-BK	18W	1550LM	Color Selectable 30K/40K/50K	18"X3"
LEDWS-N-24D24W-MCT-BK	24W	2050LM	Color Selectable 30K/40K/50K	24"X3"
LEDWS-N-36D30W-MCT-BK	30W	2550LM	Color Selectable 30K/40K/50K	36"X3"
LEDWS-N-48D36W-MCT-BK	36W	2886LM	Color Selectable 30K/40K/50K	48"X3"
LEDWS-N-72D40W-MCT-BK	40W	32560LM	Color Selectable 30K/40K/50K	72"X3"

LED COLOR CHANGING WALL SCENCE

SEARCH CODE: SC43873



SPECIFICATIONS:

Product Code	Wattage	Lumens	Color Temperature	Dimensions
LEDWS-N-24D18W-RGB-BK	18W	950LM	RGBW	24"X3"
LEDWS-N-48D36W-RGB-BK	36W	2000LM	RGBW	48"X3"
LEDWS-B-18D18W-MCT-BK	18W	1300LM	Color Selectable 30K/40K/50K	18"X3"
LEDWS-B-24D24W-MCT-BK	24W	1600LM	Color Selectable 30K/40K/50K	24"X3"
LEDWS-B-36D30W-MCT-BK	30W	1950LM	Color Selectable 30K/40K/50K	36"X3"
LEDWS-B-48D36W-MCT-BK	36W	2900LM	Color Selectable 30K/40K/50K	48"X3"
LEDWS-B-72D40W-MCT-BK	40W	2450LM	Color Selectable 30K/40K/50K	72"X3"
LEDWS-C-18D18W-MCT-BK	18W	1200LM	Color Selectable 30K/40K/50K	18"X5-7/8"
LEDWS-C-24D24W-MCT-BK	24W	1650LM	Color Selectable 30K/40K/50K	24"X5-7/8"
LEDWS-C-36D30W-MCT-BK	30W	1850LM	Color Selectable 30K/40K/50K	36"X5-7/8"
LEDWS-C-48D36W-MCT-BK	36W	2100LM	Color Selectable 30K/40K/50K	48"X5-7/8"
LEDWS-C-72D40W-MCT-BK	40W	2350LM	Color Selectable 30K/40K/50K	72"X5-7/8"

INSTALLATION GUIDE:


IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

INSTALLATION STEPS:

- ① Unscrew the four fixture screws from both sides and remove the mounting plate. The fixture can be installed on standard 2.75" or 3.5" outlet box. Attach the mounting plate to the outlet box and mark the location of the holes, drill two holes for anchors, insert anchors into the holes, twist the two self-tapping screws. Attach the mounting plate to the outlet box using two mounting screws and tighten self-tapping screws.
- ② Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Tuck all wires inside the outlet box. Choose preferred color temperature by adjusting the switch position for 3CCT models. Put the waterproof gasket on each fixture screw. Place the wall sconce on the mounting plate and secure it using fixture screws. See the manual below to adjust RGBW models.
- ③ For outdoor locations please use silicone (not included) shown in the picture below.

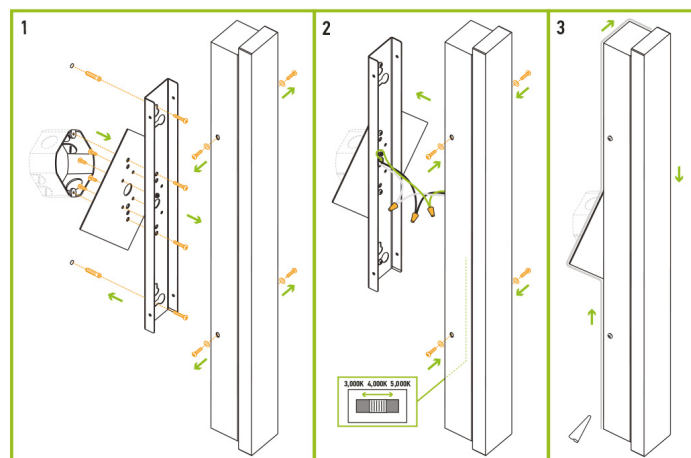

PACKAGE CONTENTS:

Description	Q-ty
LED Outdoor Wall Sconce	1
Mounting plate (A)	1
Mounting screw (B)	2
Self-tapping screw (C)	2
Fixture screw (D)	4
Wire nut (E)	3
Waterproof gasket (F)	4
Anchor (G)	2
Box	1