

# LED SUSPENDED UP/DOWN PANEL




## Features



## Specifications

- 4 Feet long
- Housing White, Die-cast aluminum
- Edge-Lit LEDs
- Voltage 120~277VAC
- 50/60Hz
- Wattage 40W
- Ambient temperature -13°F ~ 104°F
- Dimmable 0~10V dimmable
- CRI >80
- Power factor >0.95
- Efficacy 105LM/W
- IP Rating IP20
- Life span 50,000 hours
- 5-year warranty

## Application

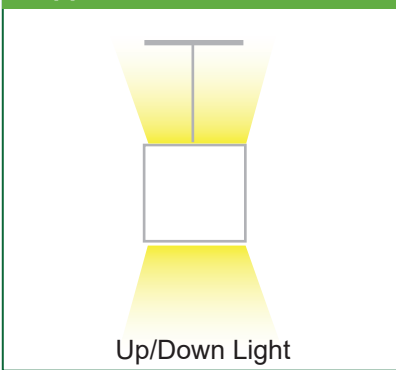

## Accessories



Adjustable 6 FT Suspension kit  
select a Y-Connector key hole set



## Specifications

Product #	Watts	Lumens	Color Temp	Dimensions
SPL-4FT-40W-50K-UD	40W	2100LM up 2100LM down	5000K	47.2"(L) x 11.7"(W) x 0.95"(H)
SPL-4FT-40W-40K-UD	40W	2100LM up 2100LM down	4000K	
SPL-4FT-40W-35K-UD	40W	2100LM up 2100LM down	3500K	

