

LED SQUARE ULTRA SLIM RECESSED LIGHTS

SSL SERIES



FEATURES:

- Multi CCT, selectable switch on back of driver
- Available in 4", 6", 8", 12" smooth recessed trims
- Isolated driver for improved thermal management



LIGHTING:

- Dimming: TRIAC dimming - Dimmable using standard LED dimmers.
- Lens: 0.125" White translucent acrylic
- LED: Seoul DOB (Driver On Board) technology
- Optics: White translucent acrylic
- Color rendering index: CRI >80
- Beam Angle: 100°-110°
- Photometrics available upon request

APPLICATION:

- LED recessed trims have been designed to be a flexible lighting solution for new construction applications, ideal for closets, storage areas, attics, corridors, or general lighting for residential or commercial applications.

WARRANTY & LISTINGS:

- 5-year warranty
- UL Listed
- Damp Rated
- 50,000 hour rated life

ELECTRICAL:

- Voltage: 120V AC
- Output voltage: 36VDC
- Power factor: >0.90
- Total harmonic distortion: <15%

MECHANICAL:

- Die-Cast Aluminum with white powder coat finish
- Recessed light housing is not required even for insulated ceiling
- Junction box 1 ¼ thick included with fixture
- Type IC Rated: Approved for direct contact with insulation
- Maximum ambient temperature: 0 to 104°F

SPECIFICATIONS:


Product Code	Size	Wattage	Lumens	Color Temperature	Finish
SSL4-MCT5	4 Inch	9W	630LM	Color Tunable 27/30/35/40/50K	White
SSL6-MCT5	6 Inch	12W	1000LM	Color Tunable 27/30/35/40/50K	White
SSL8-MCT5	8 Inch	18W	1350LM	Color Tunable 27/30/35/40/50K	White
SSL12-MCT5	12 Inch	24W	1800LM	Color Tunable 27/30/35/40/50K	White

LED SQUARE ULTRA SLIM RECESSED LIGHTS

SSL SERIES




SSL4 DIMENSION~

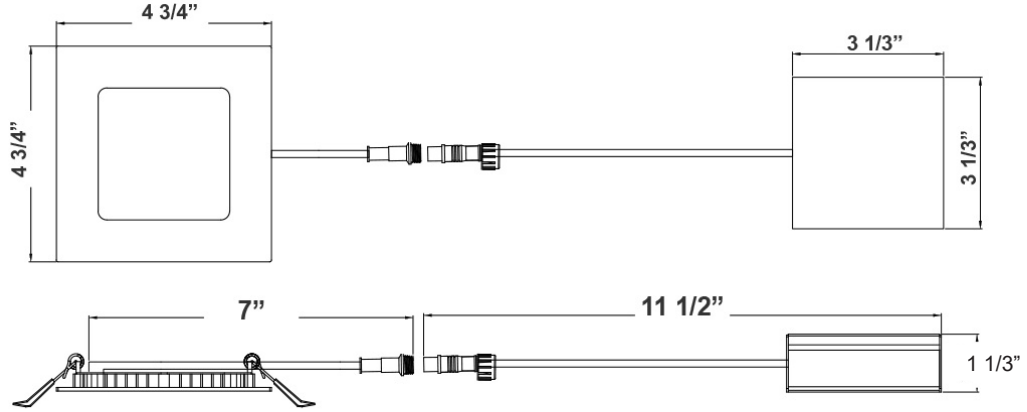


4 3/4" x 3 1/3"

SSL6 DIMENSIONS:

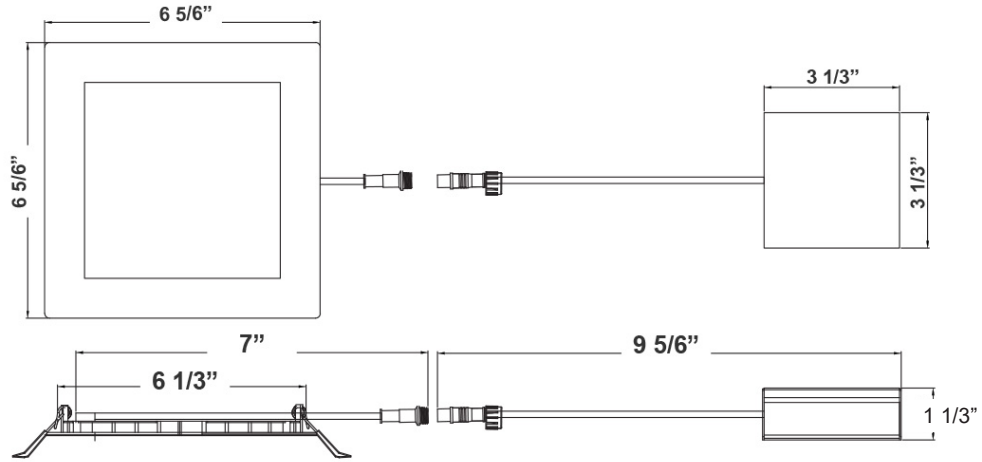

6 5/6" x 3 1/3"

SSL8 DIMENSIONS:

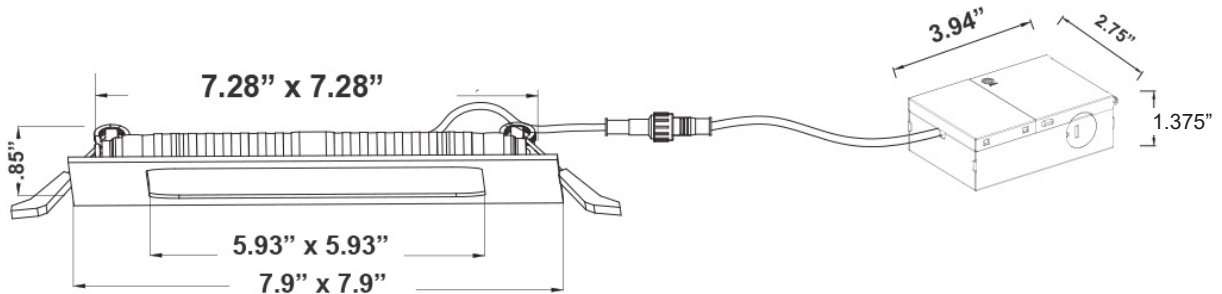


7.9" x 7.9"

LED SQUARE ULTRA SLIM RECESSED LIGHTS

SSL SERIES



SSL12 DIMENSIONS:

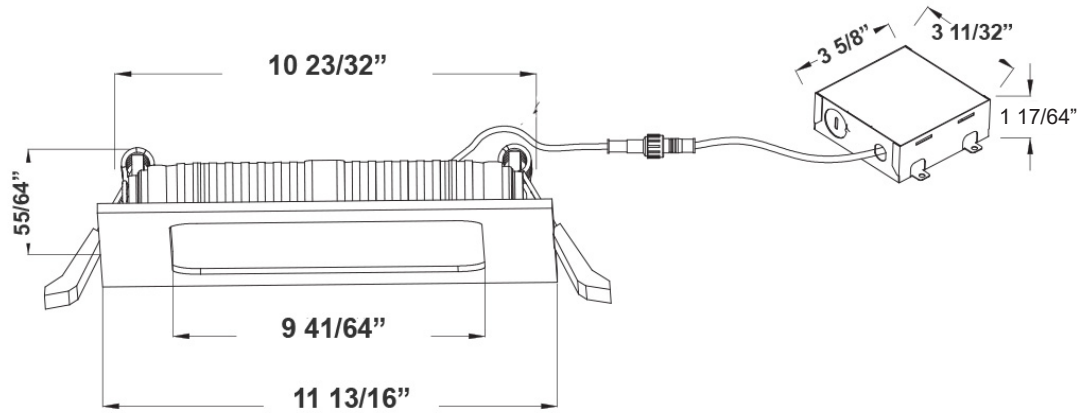

11 13/16" x 11 13/16"