

SXTEU STEEL LED EXIT SIGN

STANDARD















ILLUMINATION

Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout chevron directional indicators.


OPTIONS

 SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).

DIMENSIONS

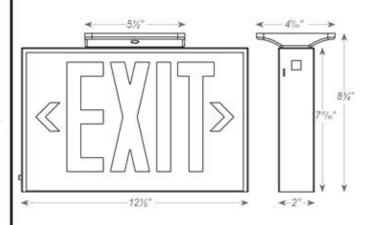

ORDERING INFORMATION

Sample Part Number: SXTEU-2-R-W-EM

| MODEL | No. of FACES | | LETTER COLOR | | HOUSING COLOR | | BATTERY | | OPTIONS | |
|-------|--------------|----------------------------------|--------------|-----------------|---------------|----------------|-------------|--------------------|---------|--------------------|
| SXTEU | 35 | Single Face Universal Single/ | R | Red Green | W B | White Black | Blank EM | AC Only Battery | SDT | Self-diagnostics 1 |
| | | Double Face | | N. STONEY STATE | | 30.0-40.000 | 1 | Backup | | |