

LED VAPOR TIGHT FIXTURE 30W, 50W, 75W



Feautures



Construction


- Translucent Frosted LensElectrostatic Painted Steel Gear
- Tray. •Voltage 120V
- 50,000 Hour Lifespan.
- Storm, Sand And Wind Proof. Not Submersible Or Covered In Snow.

Product Description

• A Cost Effective LED Vapor Tight Fixture, Features Full Length Polycarbonate Lens, One Piece White (PC) Polycarbonate body. Designed Uses As Utility Lighting, Parking Garage, Stairwell Lighting, And Low Bay Lighting Where Meets Applicable Building And Safety Codes.

Features

- Non Corrosive (PC) Polycarbonate Housing
- Stainless Steel Spec Grade Hasps And Clips.
- Back KO Location And End Sealed Conduit Openings Methods.
- Surface Mount STD. And Suspension Kit Optional .
- IP65 Rated With Hermetic Sealing.
- 50W Suitable For Low Bay Applications.

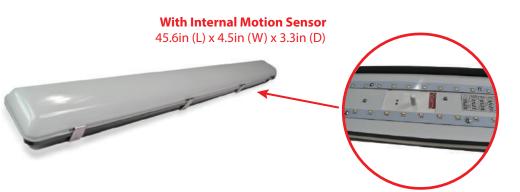

30 Watt 3800 Lumens Specifications

| Product Code | Wattage | Lumens | Motion Sensor | Color Temp | CRI |
|----------------------|---------|--------|-----------------------|------------|-----|
| 6201V4806SU30DV50 | 30W | 3,800 | No | 5000K | 80 |
| 6201V4806SU30DV50-MS | 30W | 3,800 | Yes (Internal Sensor) | 4000K | 80 |

No Motion Sensor

Motion Sensor



50in (L) x 6in (W) x 4in (D)

50in (L) x 6.75in (W) x 4.75 (D)

50 Watt 6,400 Lumens Specifications

| Product Code | Wattage | Lumens | Motion Sensor | Color Temp | CRI |
|----------------------|---------|--------|-----------------------|------------|-----|
| 6201V4806SU50DV50 | 50W | 6,400 | No | 5000K | 80 |
| 6201V4806SU50DV50-MS | 50W | 6,400 | Yes (External Sensor) | 5000K | 80 |
| 6201V4806SU80DV50 | 75W | 9,300 | No | 5000K | 80 |

LED VAPOR TIGHT FIXTURE 100W, 150W





Specifications

- Housing: Polycarbonate
- Lens: Clear Polycarbonate (Optional Opal Lens available)
- With stainless steel clamps
- Stainless Steel Mounting Brackets Incorporated on the Back
- LED SMD type: Edison 2835
- Driver: ARCATA/ANTRON
- Input Voltage: 120V~277V AC
- Dimmable (0~10V dimming)
- IP65
- 5-year warranty
- Operating Temperature: -22°F~104°F
- Wet Location

Features

 Ideal for offices, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is challenging.

Ideal For

- Workshops
- Garages
- Canopies
- Parking Garages
- Cold Storage Facilities
- Food Processing Facilities
- Farmyards
- Humid, Dusty & Wet Environment Lighting applications.

52.4"(L) x 14.6"(W)x 4.7"(H)



LED Linear Vapor Lights (100-150W) Specifications

| Product Code | Wattage | Lumens | Color Temp | Dimensions |
|--------------------|---------|----------|------------|------------------------------|
| 6201V4806SU100DV50 | 100W | 12,500LM | 5000K | 52.4"(L) x 14.6"(W)x 4.7"(H) |
| 6201V4806SU150DV50 | 150W | 18,750LM | 5000K | 52.4"(L) x 14.6"(W)x 4.7"(H) |