

LED VERSATILE WALL PACK

QUICK SEARCH: SC10327



FEATURES:


- Powder coat finish
- Finish: Bronze
- Die-Cast aluminum housing
- Low Maintenance
- Replaces up to 100W metal halide
- Mounting: Wall mount or conduit using knockout

LIGHTING:

- Color Temperature: Available in Daylight, Cool White, and Soft White
- Vandal resistant Lens
- Polycarbonate Lens

DIMENSIONS:

11.4" (L) x 4.5" (W) x 3.5" (H)

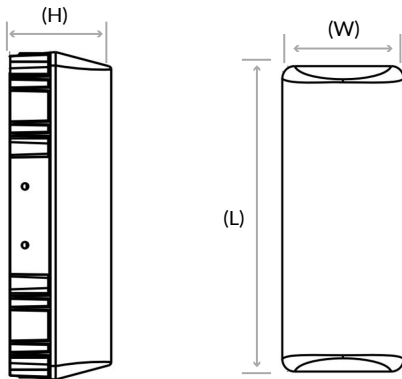

WARRANTY & LISTINGS:

- 5-year warranty
- UL Listed
- DLC
- Wet Rated

MECHANICAL:

- Equivalency: 50-100 MH
- Voltage: 100V-277 VAC / 60 Hz
- Power factor: 0.90
- ADC12 Aluminum heat sink
- Operating temperature: -40°F to 104°F

APPLICATION:

- General site lighting
- Loading docks
- Doorway
- Pathway
- Parking areas

SPECIFICATION:

Product Code	Wattage	Lumens	Color Temperature	Dimensions
LVW-20W-50K	20W = 50-100MH	1900 Lumens	5000K Daylight	11.4" (L) x 4.5" (W) x 3.5" (H)
LVW-20W-40K	20W = 50-100MH	1900 Lumens	4000K Cool White	
LVW-20W-30K	20W = 50-100MH	1900 Lumens	3000K Soft White	