

# LED Cutoff WALL PACK FIXTURES



## Features



## Warranty

- 5 Year Limited Warranty

## Features

- Sealed die-casting profile for outdoor applications
- Available with Type II and Type III photometry
- Head tilts max 20degree for different lighting purpose
- Replacing 50-100W HID
- Lumen output from 2000-4500lm with efficacy of 100lm/w
- Built-in UL class 2 driver, optional for photocell
- UL listed and DLC qualified



## Applications

- Security, pathway and perimeter lighting
- Build entryways and walkways

## Mounting

- Fits electrical box and wall mount directly

## Dimensions

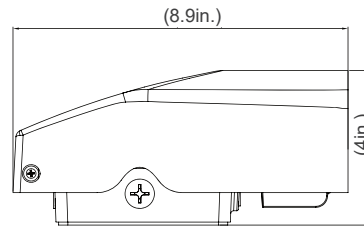


## Specifications

Product #	Watt	Lumens	CCT	CRI	Finish Color	Lens
WPI30W27V50KD	30W	3000	5000K	80	Dark Bronze	Tempered Glass Lens
WPI40W27V50KD	40W	4500	5000K	80	Dark Bronze	Tempered Glass Lens
WPI70W27V50KD	70W	7500	5000K	80	Dark Bronze	Tempered Glass Lens
WPI90W27V50KD	90W	9700	5000K	80	Dark Bronze	Tempered Glass Lens
WPI105W27V50KD	105W	1200	5000K	80	Dark Bronze	Tempered Glass Lens


## Photometrics

WPI20W27V40KD

Luminous Intensity Distribution Curve




Illuminance at a Distance




WPI30W27V40KD

Luminous Intensity Distribution Curve




Illuminance at a Distance



WPI40W27V40KD

Luminous Intensity Distribution Curve



Illuminance at a Distance

