

Warehouse Linear LED High Bay Fixtures

Search Code: SC7043



FEATURES

- *High Efficiency: Up to 150 lm/W (On Select Models).*
- *Durable Construction: Vented steel housing provides thermal management through natural convection. Die-cast aluminum housing. Impact-resistant polycarbonate lens with a white powder coat Finish.*
- *V-hook and aircraft cables included.*
- *Emergency Battery-Backup and Occupancy Sensor options.*
- *Versatile Applications: Suitable for residential and commercial settings.*
- *Dimmable Options: 0-10V smooth dimming compatibility with using standard low voltage dimmers.*
- *Damp location certified.*
- *Quick and easy, with multiple installation methods.*
- *Customizable Settings: Available in multiple wattages and color temperatures. Color temperature and wattage is adjustable on select models.*
- *Super bright Lumileds LEDs.*
- *Beam Angle: 90°*
- *Long Lifespan: Rated for up to 50,000 operational hours.*

ELECTRICAL

- *Input Voltage: 120-277V. 480 volt option available as special order.*
- *Total Harmonic Distortion (THD): < 20%*
- *CRI: ≥80.*
- *Power Factor: >0.9.*
- *Operating Temperature Range: (-17°C to 40°C) 0°F to 104°F.*
- *10kA surge protection standard.*




WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL, cULus for damp locations, DLC Listed, RoHS, FCC Compliant.*

MOUNTING

- *Can be mounted on standard j-box conduit or suspended with the included steel cable.*

DIMENSIONS

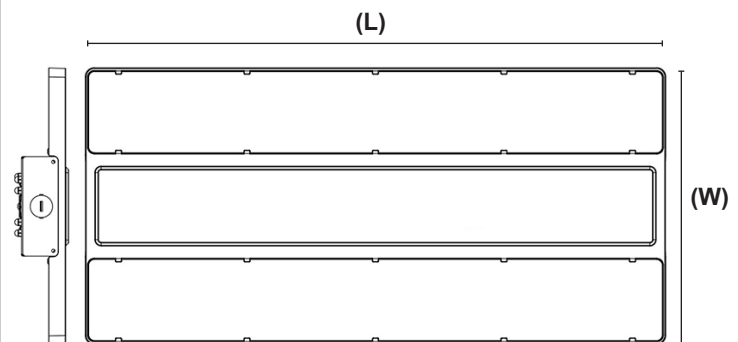

ORDERING INFORMATION

Product Code	Size	Wattage	Replaces	Lumens	Color Temperature	Accessories
LH1-090-50-U	11" x 23"	90W	175W MH	13500L	5000K Daylight	As is - None
HBL22D135W27V50K-FD	16.5"x10"	135W	250W MH	20250L	5000K Daylight	As is - None
CLH1-LSCS-EDMV-MD	10" x 23"	160W	400W MH	24000L	Selectable 4K/5K	As is - None
HBL12D240MW34VMCT-CD-BEST	12" x 20"	240W Max	1000W MH	36000L	Selectable 4K/5K	As is - None
LH1-PS320-50-U	12.5" x 23"	320W	1000W MH	48000L	5000K Daylight	As is - None