

LED Adjustable Angle Multi Color-Temperature Under Cabinet Lights



Specifications

- Linkable
- 1/2" KOs for hardwiring installation (multiple on top and back)
- Built-in LED driver
- Available in 7 lengths: 8", 16", 12", 21", 24", 33", & 42"
- 22-gauge sheet metal housing, white or bronze enamel finish, painted after fabrication
- Very low, 1" profile, only 3.25" wide
- Tempered glass lens for easy cleaning, inside frosted to reduce LED imaging
- Adjustable color temperature
- CRI=84
- Working voltage: 120V with plug and hardwire option included
- Color packaging with hanging tab
- 3.37" flex connector and mounting screws included
- Includes 6' power cord with plug and (1) 8" interconnect cable
- Key-holed mounting slots in housing simplify installation

Features

- LEDs offer incredible brightness, energy efficiency and color rendering.
- Low heat, easy installation, environmentally friendly and maintenance free for many years
- Ideal for under cabinet, display cases or in low profile areas

LED Adjustable Angle Multi Color-Temperature Under Cabinet Lights

Quick Search Code: S18029



Product No	Description
SLUCA-8-WHT	3W 150LM 2700K/3000K/4000K 8"Length White
SLUCA-12-WHT	5W 275LM 2700K/3000K/4000K 12"Length White
SLUCA-16-WHT	6.5W 390LM 2700K/3000K/4000K 16"Length White
SLUCA-21-WHT	8W 450LM 2700K/3000K/4000K 21"Length White
SLUCA-24-WHT	12W 650LM 2700K/3000K/4000K 24"Length White
SLUCA-33-WHT	16W 900LM 2700K/3000K/4000K 33"Length White
SLUCA-42-WHT	20W 1100LM 2700K/3000K/4000K 42"Length White
SLUCA-8-BRZ	3W 150LM 2700K/3000K/4000K 8"Length Bronze
SLUCA-12-BRZ	5W 275LM 2700K/3000K/4000K 12"Length Bronze
SLUCA-16-BRZ	6.5W 390LM 2700K/3000K/4000K 16"Length Bronze
SLUCA-21-BRZ	8W 450LM 2700K/3000K/4000K 21"Length Bronze
SLUCA-24-BRZ	12W 650LM 2700K/3000K/4000K 24"Length Bronze
SLUCA-33-BRZ	16W 900LM 2700K/3000K/4000K 33"Length Bronze
SLUCA-42-BRZ	20W 1100LM 2700K/3000K/4000K 42"Length Bronze

Multi Color-Temperature Under Cabinet Lights Accessories Included



- 6' Power Cord
- 8" Interconnected Cable
- End-to-End Coupling
- Mounting Screws




On/Off Switch with 100% / 50% Dimming. Color Temp. selection switch: 2700K/3000K/4000K



1/2" KOs Cable Connector included


3Watt Dimensions

8"(L) x 1"(H) x 3.25"(W)

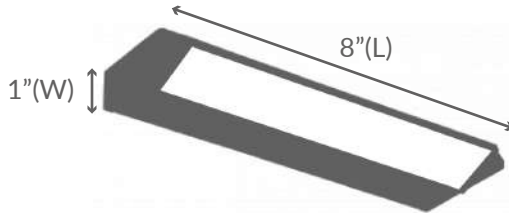


5 Watt Dimensions

12"(L) x 1"(H) x 3.25"(W)

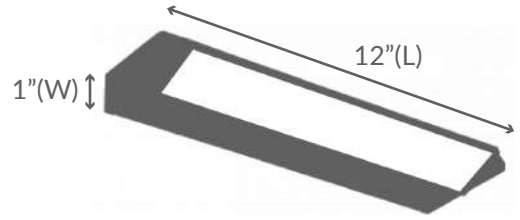


6.5W Dimensions

16"(L) x 1"(H) x 3.25"(W)

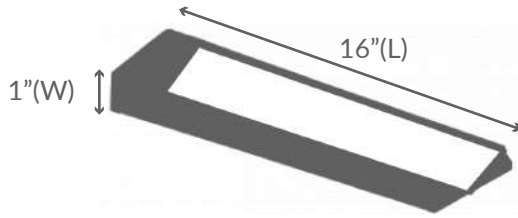


8 Watt Dimensions

21"(L) x 1"(H) x 3.25"(W)

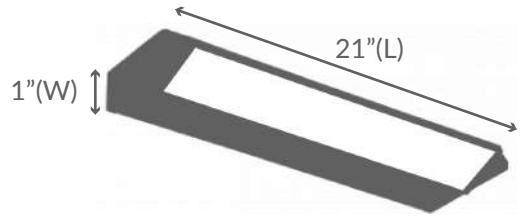


12 Watt Dimensions

16"(L) x 1"(H) x 3.25"(W)

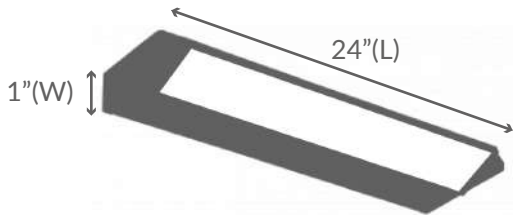

16 Watt Dimensions

21"(L) x 1"(H) x 3.25"(W)

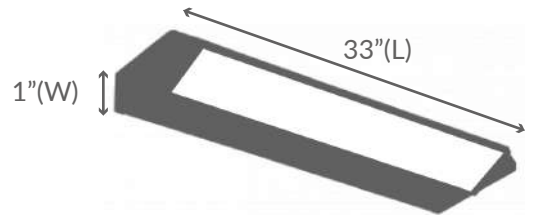

20 Watt Dimensions

16"(L) x 3.25"(W)

