

LED Bollards/Wall Step Lights




The wall lights can be used to illuminate a path or garden. Can be mounted on a wall or use optional posts to install as a bollard light. Posts are available in 2 sizes and with options for 2 or 1 sided mounting.

Features

- Die-cast aluminum with powder coat finish (Dark Bronze) optimized for LED
- Polycarbonate from housing & prismatic lens provide vandal resistance
- Four 1/2" HUB
- LED: Philips Lumileds LEDs
Voltage: 100~277V AC, 50/60Hz
- CRI:>80
- Power Factor:95%
- Operating Temp: -4° F to 104° F
70,000 hour rated life
5-year warranty
Suitable for Wet Locations, IP54

Applications

- site lighting
- alleys
- loading docks
- doorway
- pathway
- parking areas

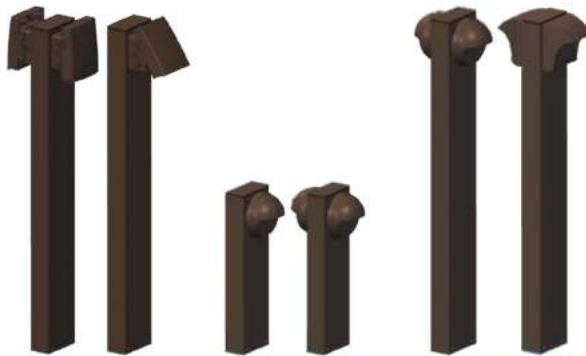

Mounting Options

Compatible with all outdoor fixtures that can be mounted on 3" or 4" octagonal bases and plaster rings

LED Bollards/Wall Step Lights, 120-277V


Quick Search Code: S20529

	Product No	Description
	WMS-S-50K-BR	6W 4400LM 5000K SQUARE BRONZE
	WMS-S-30K-BR	6W 4400LM 3000K SQUARE BRONZE
	WMS-R-50K-BR	6W 4400LM 5000K ROUND BRONZE
	WMS-R-30K-BR	6W 4400LM 3000K ROUND BRONZE
	WMS-S-50K-WH	6W 4400LM 5000K SQUARE WHITE
	WMS-S-30K-WH	6W 4400LM 3000K SQUARE WHITE
	WMS-R-50K-WH	6W 4400LM 5000K ROUND WHITE
	WMS-R-30K-WH	6W 4400LM 3000K ROUND WHITE
	WMS-POST1-18	18" One Side post for WMS series
	WMS-POST2-18	18" Two Side post for WMS series
	WMS-POST1-36	36" One Side post for WMS series
	WMS-POST2-36	36" Two Side post for WMS series

LED & HID Bollard Pathway Lights



Dimensions

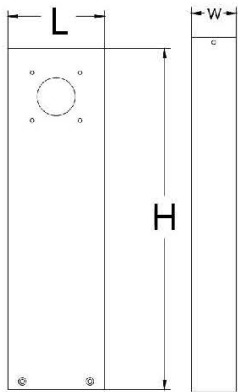

18" (H) x 5" (L) x 2.3" (W)

- 18" One side post
- 18" Two side post

36" (H) x 5" (L) x 2.3" (W)

- 18" One side post
- 18" Two side post

