

LED Non-Cutoff Wall Pack With Photocell




Built To Last, Vandal-Proof!

The 9510 wall pack series is an economical solution for outdoor perimeter and area lighting. With a built-in photocell, and a polycarbonate housing and lens, the 9510 is a versatile and durable outdoor luminaire. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, HID wall packs.

Features

- Voltage 120~277 VAC 50/60Hz
- Wattage: 20W & 30W
- Power factor: >0.95
- Efficacy: 90LM/W~95LM/W
- LED: Philips Lumileds/SMD 3030
- Total Lumens: 2100LM & 2900LM
- Color rendering index: >82
- Beam angle: 90°x 110°
- Die cast aluminum
- Outdoor powder coat finish (Dark Bronze)
- Operating temperature 4° F ~ 104° F
- Life span: 50,000 Hrs
- IP rating: IP65, Wet Locations

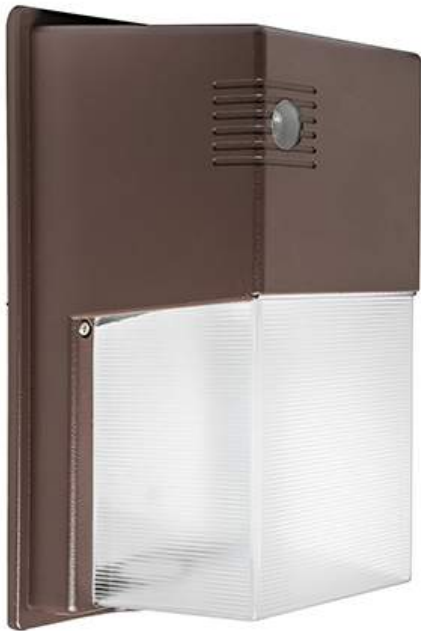

1/2" hub located at back and bottom of housing for mounting versatility



Non-cutoff optics with wide forward throw distribution ideal for extending spacing to mounting height ratio



Wall Pack with photocell comes pre-wired with 120 volt photo electric control

LED Non-Cutoff Wall Pack With Photocell, 120-277V

Quick Search Code: S20900




Product No	Description	Equivalency
9510-22-50K-PC	20W 2100LM 5000K	50 MH
9510-22-40K-PC	20W 2050LM 4000K	50 MH
9510-22-30K-PC	20W 2000LM 3000K	50 MH
9510-30-50K-PC	30W 2900LM 5000K	100 MH
9510-30-40K-PC	30W 2800LM 4000K	100 MH
9510-30-30K-PC	30W 2700LM 3000K	100 MH





Dimensions

6-7/8"(W) x 11"(H) x 5-1/8"(D)

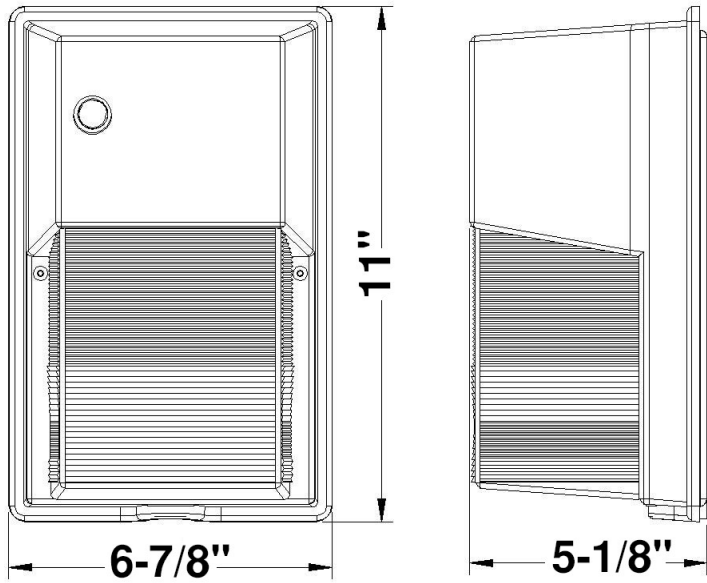

Photometrics

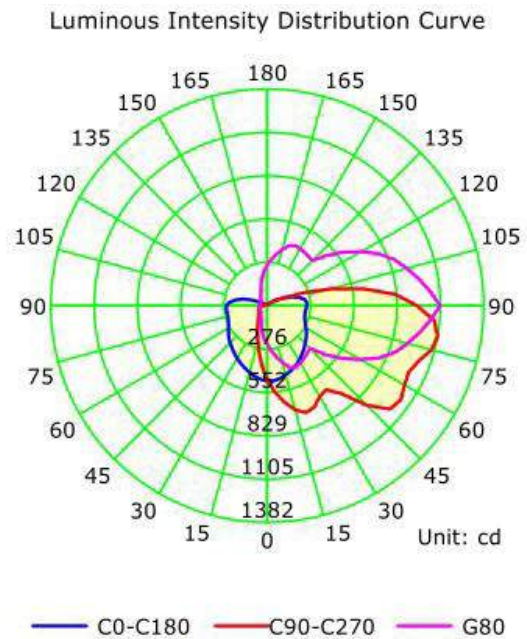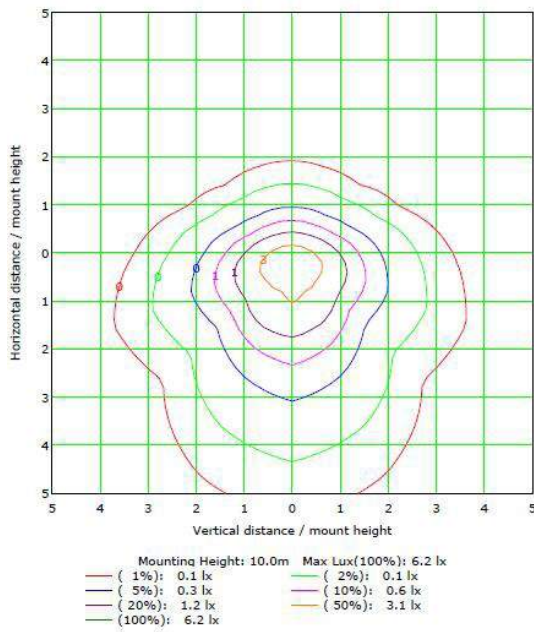

Application

