

Wattage & Color Selectable LED Post Top Lights

Search Code: SC9331



FEATURES

- **Durable Construction:** Air cooling design, aluminum housing with polycarbonate frosted lens.
- **Black or white finish options.**
- **Versatile Applications:** Suitable for commercial and residential settings.
- **Customizable Settings:** Tunable wattage and color selectable.
- **Built in photocell underneath cap.**
- **Beam Angle:** 120° wide beam.
- **Light Source:** SMD LED.
- **UL Listed power supply.**
- **IP Rating:** Wet Rated.
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Voltage:** 120V-277 VAC.
- **CRI:** >85.
- **Power Factor:** >0.95.
- **Operating Temperature Range:** -17°C to 45°C (0°F to 113°F).

Applications

- **Courtyards.**
- **Public Parks.**
- **Parking Areas.**
- **Hotels.**



WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL, cULus for wet locations, RoHS, DLC Compliant.

MOUNTING

- **Easy installation, fits up to a 3 Inch diameter pole.**

DIMENSIONS



ORDERING INFORMATION

Product Code	Wattage	Lumens	Color Temperature	Finish
7613CLB-MW-MCT	Tunable Wattage 75W/50W/30W	9750L Max	Selectable 3000K/5000K	Black
7613CLW-MW-MCT	Tunable Wattage 75W/50W/30W	9750L Max	Selectable 3000K/5000K	White
7613CLB-MW-150-MCT	Tunable Wattage 150W/100W/75W	19000L Max	Selectable 3000K/5000K	Black
7613CLW-MW-150-MCT	Tunable Wattage 150W/100W/75W	19000L Max	Selectable 3000K/5000K	White

Wattage & Color Selectable LED Post Top Lights


Search Code: SC9331



INSTALLATION

Fixture Assembly

- Feed the (3) Housing wires through one of the three rods
- Clip the (3) Rods onto the Housing. Be sure the housing clips are properly engaged onto the Rods
- Feed fixture wires through the tenon pole adaptor.
- Slide tenon pole adaptor onto the three rods. Be sure the notches face the inside of the tenon pole adaptor
- Tighten the (3) set screws at the tenon pole adaptor to secure rods

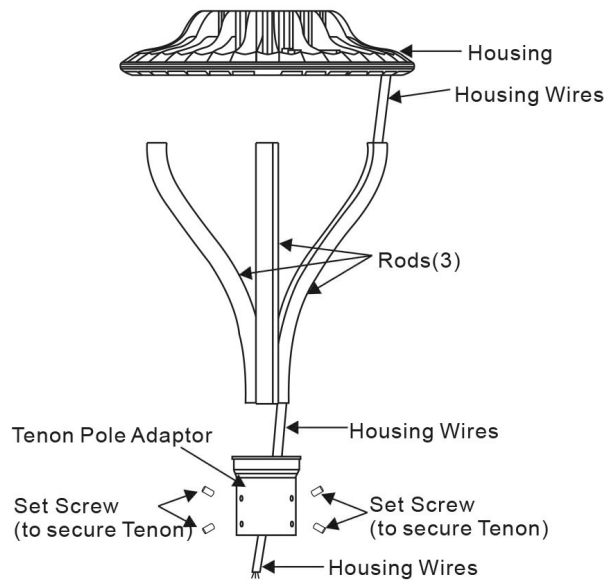

PHOTOMETRICS

