

LED Wide Beam Canopy Light Fixture

Search Code: SC65645



FEATURES

- **Durable Construction:** Rugged die-cast housing secures the thermally conductive LED panel and electrical chamber. Light weight design with heat dissipation housing and corrosion-resistant powder coating.
- **Casting thermally conducts LED heat to optimize performance and long life.**
- **Finish:** Bronze.
- **Versatile Applications:** Suitable for commercial settings.
- **Lens:** precision-engineered optical lens reducing glare.
- **Wet Location Rated.**
- **Comes with an external quick-mount plate for standard J-BOX mounting.**
- **Wattage adjustable:** 100%, 80%, 60%, 40%.
- **Color selectable:** 3000K, 4000K, 5000K.
- **Scalable Lumen Packages** from 2,600 to 10,500 Lumens.
- **Standard 0-10V dimming.**
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Voltage:** Universal 120-277VAC input voltage.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.

APPLICATION

- Gas Stations.
- Parking Garages.
- Office Buildings.
- Schools & Universities.
- Industrial Facilities.



WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL cUL Listed, IP65, IP66.

MOUNTING

- **Comes with an external quick-mount plate for standard J-BOX mounting, and is also compatible with 3/4" pendant fixtures, with 1/2" knock-out holes reserved on four sides, suitable for surface conduit wiring installation.**

Surface Mounted with J-Box



Conduit Pendant Mount



ACCESSORIES

- PIR Motion Sensor.
- Emergency Battery.






ORDERING INFORMATION

Product Code	Wattage	Lumens	Color Temperature	Options
7804CLBR040MW-MCT	Watt Selectable 40/32/24/16W	6200 Max Lumens	Selectable 30K/40K/50K	As Is-None
7804CLBR040MW-MCT-PIR	Watt Selectable 40/32/24/16W	6200 Max Lumens	Selectable 30K/40K/50K	PIR Motion Sensor
7804CLBR040MW-MCT-EM	Watt Selectable 40/32/24/16W	6200 Max Lumens	Selectable 30K/40K/50K	Emergency Battery
7804CLBR070MW-MCT	Watt Selectable 70/56/42/28W	10500 Max Lumens	Selectable 30K/40K/50K	As Is-None
7804CLBR070MW-MCT-PIR	Watt Selectable 70/56/42/28W	10500 Max Lumens	Selectable 30K/40K/50K	PIR Motion Sensor
7804CLBR070MW-MCT-EM	Watt Selectable 70/56/42/28W	10500 Max Lumens	Selectable 30K/40K/50K	Emergency Battery

LED Wide Beam Canopy Light Fixture

Search Code: SC65645


DIMENSIONS

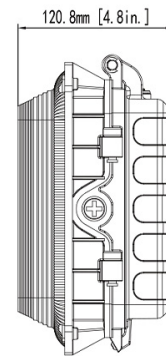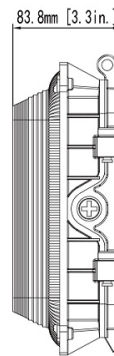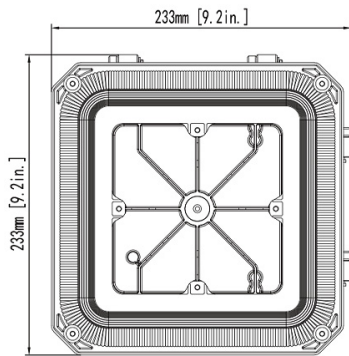

Without Emergency Battery

With Emergency Battery

INFOGRAPHIC

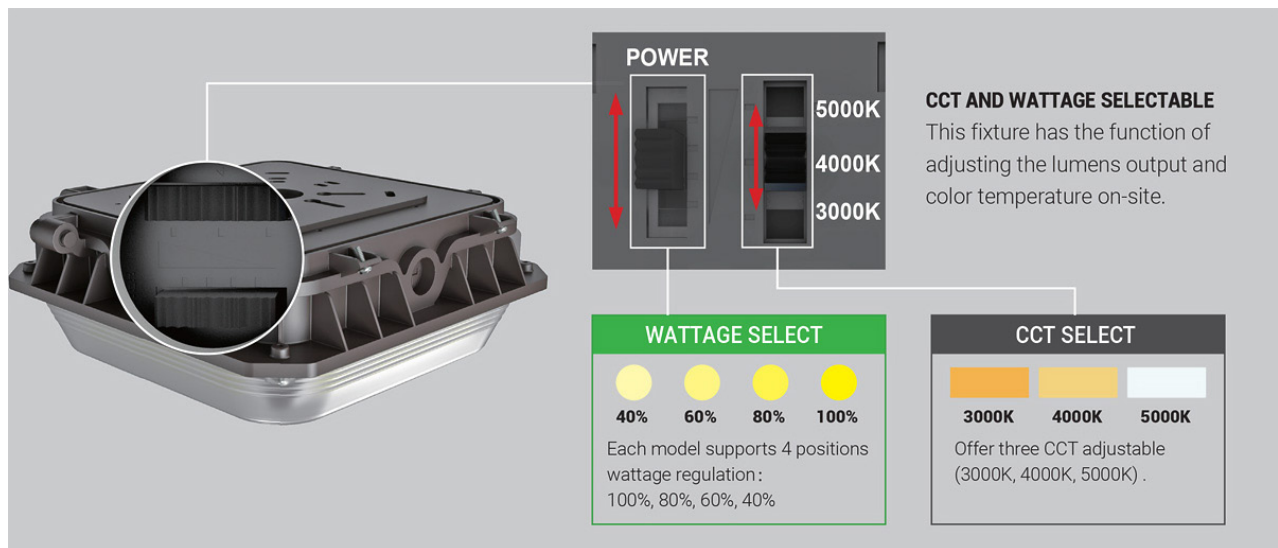

POWER

CCT AND WATTAGE SELECTABLE
This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT

40% 60% 80% 100%

Each model supports 4 positions wattage regulation: 100%, 80%, 60%, 40%

CCT SELECT

3000K 4000K 5000K

Offer three CCT adjustable (3000K, 4000K, 5000K).


Battery backup option

The optional built-in emergency battery back-up provides 8W, 90-minute emergency lighting while maintaining product integrity and aesthetics.



Plug-and-Play Sensor (optional)

Sensor allows for security and energy saving.

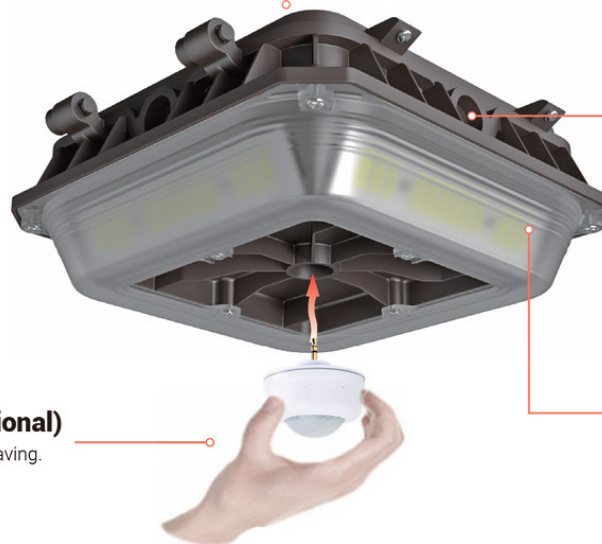

1/2inch knock hole

With 1/2" knock-out holes reserved on four sides, suitable for surface conduit wiring installation.

Photometry

Parking garage photometry with a low glare, comfortable lighting effect.