

LED T8 Universal Retrofit Tube Bulbs

Search Code: SC7081



FEATURES

- *High Efficiency: Up to 120 lm/W (On Select Models).*
- *Durable Construction: Shock and vibration resistant. No strobe effect (flicker found in fluorescent lights).*
- *Customizable Settings: Available in multiple wattages and color temperatures. Color temperature is adjustable on select models.*
- *No mercury and completely recyclable.*
- *IP Rating: IP20 damp location (Indoor).*
- *Perfect for applications with frequent 'on/off' switching cycles.*
- *Tubes are made of glass and will require a sleeve for food service.*
- *Beam Angle: 120°.*
- *Base Type: Medium Bi-Pin G13 Base.*
- *Direct wire/ballast compatible replacement for linear fluorescent T8 lamps in existing fixtures. Double ended wiring/shunted sockets. *not compatible with magnetic ballasts**
- *Long Lifespan: Rated for up to 50,000 operational hours.*

ELECTRICAL

- *Voltage: 120-277V line voltage.*
- *CRI: ≥ 80.*
- *Power Factor: > 0.90*
- *Total Harmonic Distortion (THD): < 20%.*
- *Operating Temperature Range: (-17°C to 45°C) 0°F to 113°F.*
- *Frequency Range: 50Hz~60Hz*
- *Not dimmable.*

ORDERING INFORMATION

Product Code	Size	Lens	Wattage	Lumens	Color Temperature
T8-EZ6-GS-2FT-10W-35K-F	2 Foot	Frosted	8W	1000L	3500K Neutral White
T8-EZ6-GS-2FT-10W-50K-F	2 Foot	Frosted	10W	1200L	5000K Daylight
T8-EZ6-GS-2FT-10W-40K-F	2 Foot	Frosted	10W	1000L	4000K Cool White
T8-EZ6-GS-2FT-10W-30K-C	2 Foot	Clear	10W	1200L	3000K Soft White
T8-EZ6-GS-2FT-10W-30K-C	2 Foot	Clear	10W	1200L	5000K Daylight
T8-EZ6-GS-2FT-10W-40K-C	2 Foot	Clear	10W	1200L	4000K Cool White
T8-EZ6-GS-2FT-10W-35K-C	2 Foot	Clear	10W	1200L	3500K Neutral White
102775	4 Foot	Frosted	13W	1800L	4000K Cool White
102774	4 Foot	Frosted	13W	1800L	3500K Neutral White
S11763	4 Foot	Frosted	15W	2200L Max	Selectable 35K/40K/50K
T8-EZ6-GS-4FT-15W-50K-F	4 Foot	Frosted	15W	1900L	5000K Daylight
T8-EZ6-GS-4FT-15W-50K-C	4 Foot	Clear	15W	1900L	5000K Daylight
T8-EZ6-GS-4FT-15W-40K-C	4 Foot	Clear	15W	1800L	4000K Cool White
T8-EZ6-GS-4FT-15W-35K-C	4 Foot	Clear	15W	1800L	3500K Neutral White
T8-EZ6-GS-4FT-15W-30K-F	4 Foot	Frosted	15W	1900L	3000K Soft White



WARRANTY & LISTINGS

- *Warranty: 5 years (50,000 operational hours).*
- *Certifications: UL Listed IP20 for damp locations, DLC Listed.*

INSTALLATION

Before Install Make Sure To:

- ✓ *Read the included instructions regarding your method of installation.*
- ✓ *Please check compatibility of existing ballast when required.*
Turn off the power at the breaker.
- ✓ *All work should be performed by a qualified electrician where needed.*
- ✓ *Always install one test lamp before proceeding with the full area.*

APPLICATION


- *Commercial spaces: Used in troffers and linear fixtures.*
- *Warehouses: Common in high bays and strip lighting.*

LED T8 Universal Retrofit Tube Bulbs

Search Code: SC7081



DIMENSIONS

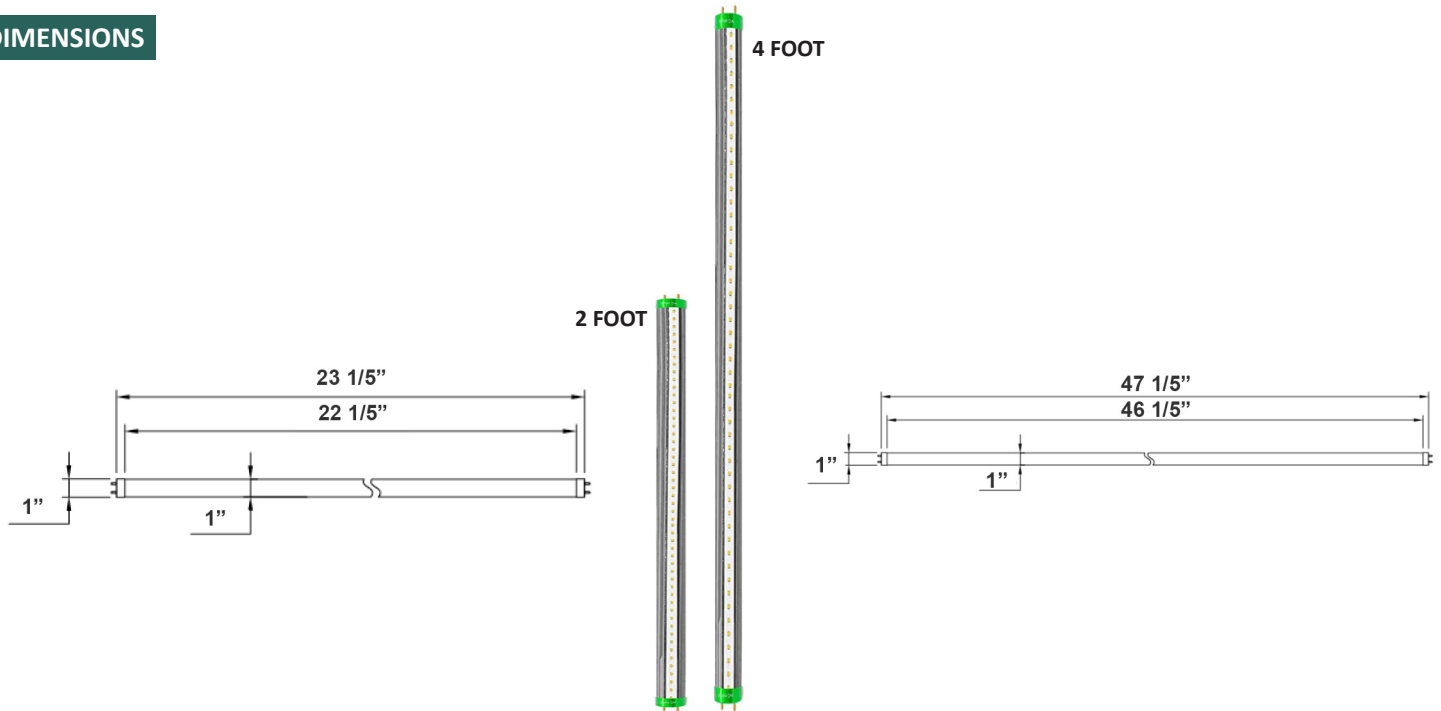

DIAGRAM

Fig. A: Ballast Compatible - No Rewiring

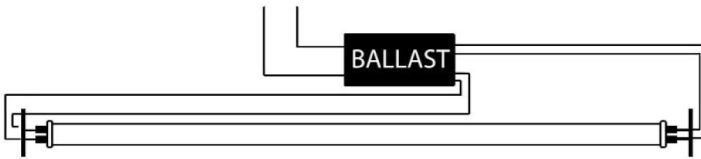


Fig. B: Ballast Bypass - Single Sided Wiring




Fig. C: Ballast Bypass - Multiple Tubes

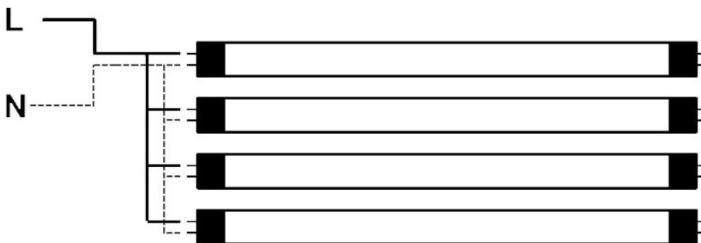


Fig. D: Ballast Bypass - Double Sided Wiring

