

Ceiling LED Wraparound Light Fixtures

Search Code: SC6870



FEATURES

- **High Efficiency:** Up to 115 lm/W (On Select Models).
- **Durable Construction:** Slim modern design. Powder coat white finish with a Polycarbonate lens and a stainless steel wall mounting bracket.
- **Versatile Applications:** Suitable for residential and commercial settings.
- **Dimmable Options:** TRIAC smooth dimming compatibility with using standard TRIAC LED low voltage dimmers.
- **Multiple Options:** Motion sensor or pull chain option available.
- **IP44 Rating:** damp location certified.
- **Quick and easy installation.**
- **Sizes:** 2 Foot or 4 Foot.
- **Customizable Settings:** Available in multiple wattages and color temperatures. Color temperature is adjustable on select models.
- **Super bright optimal light distribution.**
- **Long Lifespan:** Rated for up to 50,000 operational hours.

ELECTRICAL

- **Input Voltage:** 120-277VAC.
- **CRI:** >80.
- **Power Factor:** >0.9.
- **Total Harmonic Distortion (THD):** < 10%.
- **Operating Temperature Range:** (-17°C to 40°C) 0°F to 104°F.
- **Frequency Range:** 50Hz~60Hz.
- **Dimming:** 0-10V standard - requires low voltage dimmer.




WARRANTY & LISTINGS

- **Warranty:** 5 years (50,000 operational hours).
- **Certifications:** UL Listed, IP44 Damp Location, ETL Listed, FCC Compliant, RoHS Compliant.

MOUNTING

- **Standard junction box surface mounting or directly to drywall or concrete surfaces using proper mounting screws (not included).**

DIMENSIONS

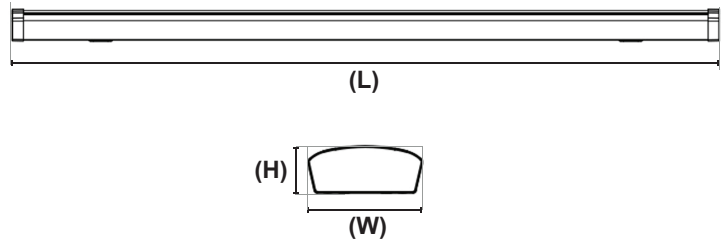

Model	Length	Height	Width
2 Foot	24"	2.6"	5.2"
4 Foot	48"	2.6"	5.2"
4 Foot (Color Selectable)	47.64"	2.14"	5.31"

ORDERING INFORMATION

Product Code	Size	Wattage	Lumens	Color Temperature	Options
CW-2FT-20W-50K-D	2 Foot	20W	1600L	5000K Daylight	As Is-None
CW-2FT-20W-40K-D-PIR	2 Foot	20W	1600L	4000K Cool White	Motion Sensor
CW-2FT-20W-40K-D	2 Foot	20W	1600L	4000K Cool White	As is - None
CW-2FT-20W-30K-D-PULL	2 Foot	20W	1600L	3000K Soft White	Pull Chain
CW-2FT-20W-30K-D-PIR	2 Foot	20W	1600L	3000K Soft White	Motion Sensor
CW-2FT-20W-30K-D	2 Foot	20W	1600L	3000K Soft White	As is - None
CW-4FT-40W-40K-D-PIR	4 Foot	40W	3500L	4000K Cool White	Motion Sensor
CW-4FT-40W-30K-D-PULL	4 Foot	40W	3500L	3000K Soft White	Pull Chain
CW-4FT-40W-30K-D-PIR	4 Foot	40W	3500L	3000K Soft White	Motion Sensor
LLW4-40W-8FCCT-UD	4 Foot	40W	3500L	Selectable 35K/40K/50K	As Is, None